



**US Army Corps  
of Engineers**

Waterways Experiment  
Station

## **Needs Assessment for Water-Level Gauging Along the Texas Coast for the U.S. Army Engineer District, Galveston**

by *Nicholas C. Kraus, WES*

*Carroll I. Thurlow, Daniel J. Heilman, Anne-Lise Lindquist,  
Mark W. Earle, Texas A&M University-Corpus Christi*

**WES**

Approved For Public Release; Distribution Is Unlimited

TA  
7  
.W34  
no. CHL-  
97-29

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.



# Needs Assessment for Water-Level Gauging Along the Texas Coast for the U.S. Army Engineer District, Galveston

by Nicholas C. Kraus

U.S. Army Corps of Engineers  
Waterways Experiment Station  
3909 Halls Ferry Road  
Vicksburg, MS 39180-6199

Carroll I. Thurlow, Daniel J. Heilman, Anne-Lise Lindquist, Mark W. Earle

Conrad Blucher Institute for Surveying and Science  
Texas A&M University-Corpus Christi  
6300 Ocean Drive  
Corpus Christi, TX 78412-5599


Final report

Approved for public release; distribution is unlimited





**US Army Corps  
of Engineers**  
Waterways Experiment  
Station

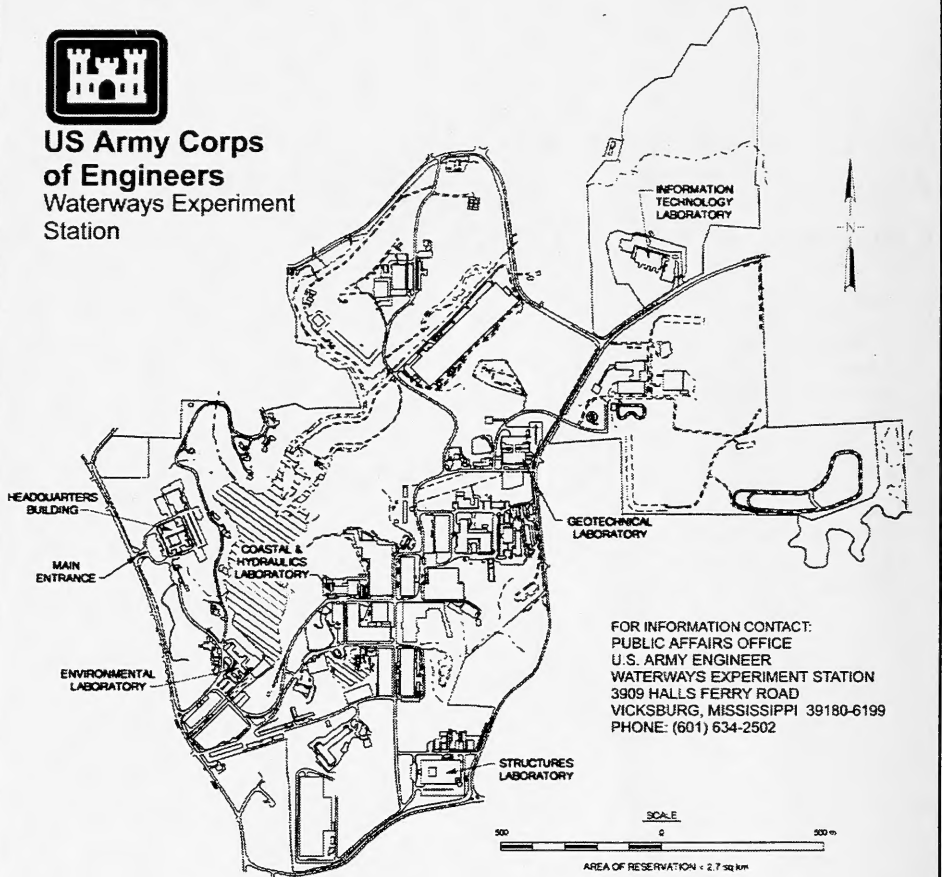

**Waterways Experiment Station Cataloging-in-Publication Data**

Needs assessment for water-level gauging along the Texas coast for the U.S. Army Engineer District, Galveston / by Nicholas C. Kraus ... [et al.] ; prepared for U.S. Army Engineer District, Galveston.

68 p. : ill. ; 28 cm. — (Technical report ; CHL-97-29)

Includes bibliographic references.

1. Water levels — Texas. 2. Navigation — Texas. 3. Stream measurements — Texas.

I. Kraus, Nicholas C. II. United States. Army. Corps of Engineers. Galveston District.

III. U.S. Army Engineer Waterways Experiment Station. IV. Coastal and Hydraulics Laboratory (U.S. Army Engineer Waterways Experiment Station) V. Monitoring Completed Navigation Projects Program (U.S.) VI. Series: Technical report (U.S. Army Engineer Waterways Experiment Station) ; CHL-97-29.

TA7 W34 no.CHL-97-29

# Contents

---

|  |      |
|--|------|
| Preface.....   | viii |
| Conversion Factors, Non-SI to SI Units of Measurement .....              | x    |
| 1-Introduction .....   | 1    |
| Background for the Needs Assessment .....                                | 1    |
| Cost-Sharing Partners and the Needs Assessment.....                      | 6    |
| Objectives .....   | 7    |
| Scope of this Report.....  | 8    |
| 2-Water Level Definition, Measurement, and Properties .....              | 9    |
| Historical Setting .....   | 9    |
| Water Level and Tidal Datums .....                                       | 10   |
| Basic concepts of tides and tide measurement .....                       | 11   |
| Tide gauge and tide station.....   | 12   |
| Zoning .....   | 13   |
| Character of the Tide Along the Texas Coast.....                         | 13   |
| 3-Present Water-Level Measurement Networks Along the<br>Texas Coast..... | 22   |
| TCOON Capabilities.....  | 22   |
| Present Galveston District Field Practice and Identified Needs .....     | 22   |
| Locations of Galveston District Tide Staffs.....                         | 26   |
| MLT and NGVD Difference.....   | 27   |
| 4-Communications Alternatives .....                                      | 28   |
| Real-Time Reporting .....  | 28   |
| Recommendations and Costs .....  | 29   |
| Centralized PC System .....  | 30   |
| Access to Archived Data.....   | 31   |

|  |    |
|--|----|
| 5-Consideration of an Expanded Network.....                                      | 34 |
| Present Status of Network.....   | 34 |
| Example of Need for Gauges.....  | 42 |
| Establishment of Stations.....   | 43 |
| 6-Conclusions and Recommendations.....   | 45 |
| Federal and State Cooperation (Backbone Network) .....                           | 45 |
| Real-Time Voice Reporting.....   | 46 |
| Training of Galveston District Personnel .....                                   | 47 |
| Project Low-Water Datums .....   | 47 |
| Engineering Utility of Archived Data.....  | 48 |
| Project-Specific Operational Gauges.....   | 49 |
| Outside (Gulf-side) Gauges and Wave Measurement .....                            | 50 |
| Investigation of DGPS .....  | 51 |
| References.....  | 54 |
| Appendix A: Locations and Capabilities of TCOON Stations,<br>September 1996..... | A1 |
| Appendix B: Locations of Galveston District Tide Staffs,<br>September 1996.....  | B1 |

SF 298

## List of Figures

---

|  |    |
|--|----|
| Figure 1. Study site, the Texas coast .....  | 2  |
| Figure 2. 1992 water level for Los Angeles, California .....                           | 16 |
| Figure 3. 1995 water level for Sandy Hook, New Jersey .....                            | 17 |
| Figure 4. 1993 water level for Fernandina, Florida .....                               | 18 |
| Figure 5. 1995 water level for Bob Hall Pier, Texas .....                              | 19 |
| Figure 6. 1994 water level for S. Padre Island Coast Guard Station .....               | 20 |
| Figure 7. 1995 water level for Packery Channel, Texas .....                            | 21 |
| Figure 8. Tide staff mounted on survey table at Channel to Victoria.....               | 24 |
| Figure 9. Freeport Entrance Channel at the U.S. Coast Guard Station,<br>Surfside.....  | 24 |
| Figure 10. Staff being replaced at Fulton Harbor public boat ramp,<br>Aransas Bay..... | 25 |
| Figure 11. TCOON quality control station list .....                                    | 32 |
| Figure 12. TCOON quality control station 001: Naval Air Station.....                   | 33 |
| Figure 13. Chart A (includes NOAA charts 11342 and 11343) .....                        | 37 |
| Figure 14. Chart B (includes NOAA chart 11332).....                                    | 37 |
| Figure 15. Chart C (includes NOAA charts 11326 and 11329).....                         | 38 |
| Figure 16. Chart D (includes NOAA chart 11323).....                                    | 38 |
| Figure 17. Chart E (includes NOAA charts 11321 and 11322).....                         | 39 |
| Figure 18. Chart F (includes NOAA charts 11316, 11317, and 11319).....                 | 39 |

|  |    |
|--|----|
| Figure 19. Chart G (includes NOAA charts 11313 and 11315) .....  | 40 |
| Figure 20. Chart H (includes NOAA charts 11307 and 11308) .....  | 40 |
| Figure 21. Chart I (includes NOAA chart 11304) .....   | 41 |
| Figure 22. Chart J (includes NOAA charts 11301 and 11303) .....  | 41 |
| Figure 23. Plot of simultaneous water-level records at three neighboring<br>nontidal stations along the GIWW ..... | 43 |



## List of Tables

---

|  |    |
|--|----|
| Table 1. Elevation Difference Between mlt and NGVD 29 .....  | 27 |
| Table 2. Features of Selected Voice-Reporting Systems.....   | 28 |
| Table 3. Estimated Cost of Stand-Alone (per gauge) Voice-Reporting System.....   | 30 |
| Table 4. Gauges with Speech Capability, December 1996.....   | 31 |
| Table 5. Summary of Water-Level Stations on the Texas Coast and Inland Coastal Waters .....  | 35 |
| Table 6. Recommended Long-Term Water-Level Stations (Backbone Network) and Required Short-Term Stations to Fill in Gaps for Support of USACE Operations..... | 52 |
| Table A1. TCOON and NOS Water-Level Stations .....   | A2 |
| Table B1. Locations of USACE – Galveston District Tide Staffs .....  | B2 |

# Preface

---

The needs assessment for water-level measurement and associated information described in this report was conducted for the U.S. Army Engineer District, Galveston (CESWG). Work was performed under Modification/Amendment No. P00003 of Contract No. DACW64-95-C-0018 with the Conrad Blucher Institute (CBI) for Surveying and Science, Texas A&M University-Corpus Christi, in support of the Texas Coastal Ocean Observation Network (TCOON). Notice of authorization to proceed with work under the amendment was received on 29 April 1996. An interim draft of this report was provided to CESWG on 30 September 1996.

The assessment was performed by Dr. Nicholas C. Kraus, formerly Director of the Division of Coastal and Estuarine Processes, CBI, and presently Research Scientist, Coastal and Hydraulics Laboratory, CHL), U.S. Army Engineer Waterways Experiment Station (WES); Mr. Carroll I. Thurlow, consultant to TCOON and formerly Chief of the Tides and Water-Level Program for the National Ocean Service (NOS), National Oceanic and Atmospheric Administration; and former CBI staff members; Mr. Daniel J. Heilman and Ms. Anne-Lise Lindquist, Research Scientists, and Mr. Mark W. Earle, Communications Specialist. Technical points of contact at CESWG were Mr. John Rozsypol, Ms. June Keller, Mr. Ron Meyers, and Mr. Tom Hunt. The field reconnaissance benefited from the assistance of numerous staff members of Area Offices and Field Offices of the Galveston District: Mr. Randy Batiste, Port Arthur Field Office; Mr. Isidro Garcia, Brownsville Field Office; Mr. Ramon Sierra, Southern Area Office, Corpus Christi; Mr. David Torrez, Bay City Field Office; and Mr. Rick Tryals, Northern Area Office, Galveston. General assistance to the study was also provided by Galveston District staff members from the

Southern Area Office, Corpus Christi: Mr. Carl Anderson, Area Engineer; Mr. Domingo Galindo, Project Engineer; and Mr. Elijio Garza, Civil Engineer.

This study received assistance from TCOON staff at CBI, in particular, by former TCOON Project Manager Mr. T. Zachariah Jeffries. The cooperation of NOS staff in providing water-level data is appreciated.

At the time of publication of this report, Dr. James R. Houston served as Director of the CHL; Assistant Directors were Messrs. Richard A. Sager and Charles C. Calhoun, Jr. Director of WES was Dr. Robert W. Whalin. Commander was COL Robin R. Cababa, EN.

*The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.*

# Conversion Factors, Non-SI to SI Units of Measurement

---

Non-SI units of measurement used in this report can be converted to SI units as follows:

| <b>Multiply</b>       | <b>By</b> | <b>To Obtain</b> |
|-----------------------|-----------|------------------|
| cubic yards           | 0.7645549 | cubic meters     |
| feet                  | 0.3048    | meters           |
| miles (U.S. nautical) | 1.852     | kilometers       |
| miles (U.S. statute)  | 1.609347  | kilometers       |

# 1 Introduction

---

This report contains a reconnaissance assessment of needs for water-level information by the U.S. Army Engineer District, Galveston (CESWG). The CESWG conducts navigation channel maintenance and operations along the Texas coast from the Sabine River on the north to the Brownsville Ship Channel on the south (Figure 1). The Texas coast is approximately 350 miles<sup>1</sup> long and contains more than 1,000 miles of deep- and shallow-draft navigation channels running through bays, estuaries, lagoons, and rivers, as well as eight maintained channels running to the Gulf of Mexico through inlets. The CESWG has identified a general need to have both real-time and recorded data on water level for conducting its navigation channel maintenance and operation, coastal engineering, and environmental regulatory functions in an economical and accurate way. This report identifies general and some specific needs for water-level information, and it gives a recommendation for obtaining such information.

## Background for the Needs Assessment

The CESWG maintains and operates Federally authorized channels and waterways along the coast of Texas, which include ship channels and the Gulf Intracoastal Waterway (GIWW). In support of its navigation mission, CESWG dredges more than 40 million cu yd of sediment annually. Both Government surveyors and the CESWG's dredging and other contractors perform hydrographic surveys in support of these dredging operations. Such activities associated with navigation channel

---

<sup>1</sup>A table of factors for converting non-SI units of measurement to SI units is presented on page x.

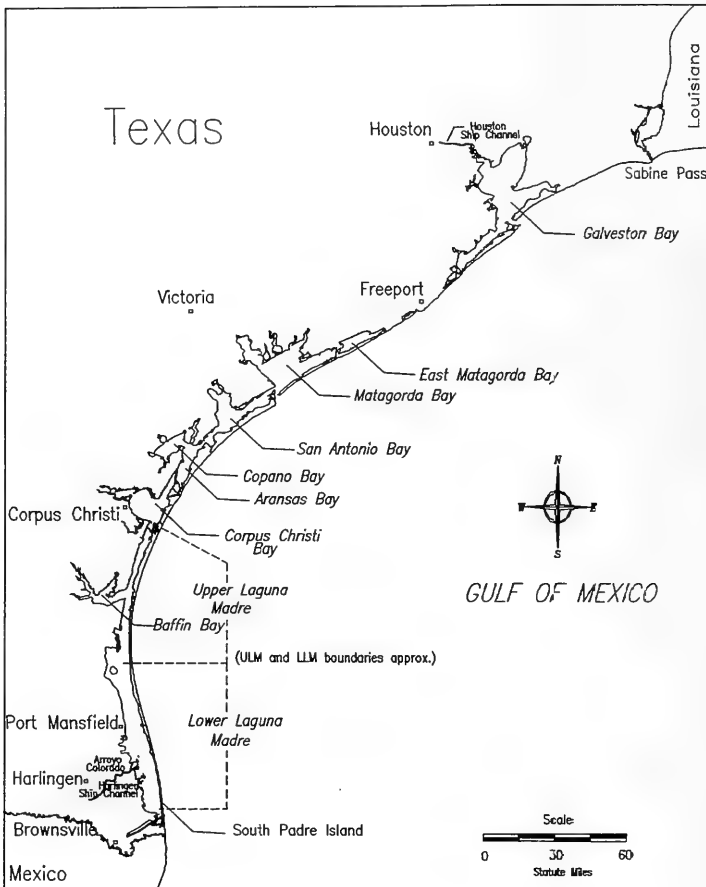


Figure 1. Study site, the Texas coast

maintenance and operation require knowledge of water level prior to, during, and after dredging. The CESWG also conducts coastal engineering works and environmental regulatory functions that involve water-level data. In conducting these activities, information in real time (during the activity) is often needed, whereas in some situations convenient access to recently recorded measurements is sufficient.

In a more general context, the National Ocean Service (NOS) of the National Oceanic and Atmospheric Administration (NOAA), U.S. Department of Commerce and U.S. Army Corps of Engineer (USACE) Districts nationwide are converting to mean lower low water (mllw) as the chart datum for navigational tidal waters of the United States. The NOS is revising charts for the east and Gulf coasts with mllw as chart datum, a several-year process. Tidal datums such as mllw are calculated and published by NOS, and, by mandate of the Congress of the United States, the USACE must reference this NOS chart datum. The Districts are following guidance issued by Headquarters, USACE, in Engineer Technical Letter (ETL) 1110-2-349 (USACE 1993). Also, by ETL 1110-1-152 (USACE 1994), Districts are required to implement the North American Vertical Datum of 1988 (NAVD 88) as a replacement for the National Geodetic Vertical Datum of 1929 (NGVD 29).

The NGVD 29, a standard geodetic reference for elevations, is sometimes confused with or referred to synonymously as mean sea level (msl). The datum msl is defined by NOS as the average of the hourly values of water-level readings of a specific 19-year tidal epoch called the National Tidal Datum Epoch (NTDE), presently 1960 to 1978. However, because there are many variables controlling water level, and because a geodetic datum represents a best-fit surface over a broad area and not to a specific area, NGVD 29 is not, in general, equal to msl. The geodetic datum can deviate from msl by 1 ft or more, depending on location. Thus, NGVD 29 and NAVD 88 are not equal to msl, do not bear a consistent relation to msl along a coast, and are fixed, whereas the elevation of msl typically changes slowly with time.

For several decades, CESWG has recognized that standard low-water datums such as mean low water (mlw) and mllw that are defined in terms of the daily phase of the tide as computed by NOS are not adequate as a navigation datum within the waterways along the Texas coast. This recognition owes to four observations:

- a. In the shallow inland coastal waters of Texas, the astronomical tidal signal is very weak, and the seasonal change in water elevation within waterways typically exceeds the range in daily tidal elevation for long periods of time (as long as months).

- b. Persistent strong winds that blow daily or move through an area as a weather front have a much greater influence on the change in the water level on the shallow inland coastal waters of Texas, producing either water setup or setdown, depending on location in a water body.
- c. Storm surges and water-level changes accompanying differences in air pressure can greatly change water level in shallow basins.
- d. Occasional strong river discharges, such as from the Brazos and Colorado Rivers, will temporarily alter the water level more than the astronomic forces.

All four of these phenomena are not directly related to the astronomical or deterministic tide and tidal datums as presently defined by NOS.

In addition, recent densification of tide stations on the Texas coast and inspection of the resultant data have shown that, for much of the GIWW and associated channels distant from inlets, an mllw tidal datum cannot be computed following NOS standards and procedures. The mllw datum is obscure because the meteorologically induced water motions that mask the daily range of astronomic highs and lows is too small. An NOS technical report (Gill, Hubbard, and Dingle 1995) documents the nontidal character of portions of the Laguna Madre. This finding applies to much of the GIWW and associated coastal inland channels. A navigation datum must be developed for such areas as well. The establishment of a fixed low-water datum, such as is used in the Great Lakes and on the Mississippi River for navigational purposes, is the practical solution. Such a datum should be low enough that the water level will seldom, if ever, fall below it. This datum can be readily implemented by specifying the proper design channel depth in terms of the NOS chart datum for the project water body.

In light of such observations, in the 1950s the CESWG established a navigation datum which it called “mean low tide” (mlt) and defined it in terms of a fixed vertical reference, namely, NGVD 29. For example, in the Corpus Christi Bay area, mlt is 1 ft below NGVD. Accuracy achievable with modern instrumentation for measuring water level, as well as the requirement of reference to chart datum, bring the need to relate mlt



to mllw and, preferably, to an as-yet-to-be defined navigation low-water datum for portions of the inland coastal waters of Texas. A rational navigation datum for the Texas coast must be developed and implemented that accounts for the extended periods of time during which water level along the Texas coast lies significantly below mllw.

According to Engineer Manual (EM) 1110-2-1003 (USACE 1991), page 7-1, “when elevations are referred to a tidal reference plane in coastal waters of the United States, mean lower low water (mllw) shall be used as the vertical datum.” The manual further states “In coastal areas, every attempt should be made to assure that USACE datums are the same as, or have a direct relationship to (underlining added by present authors), the NOS chart datums. This is essential to ensure consistency for mariners and others using Federal map and chart products.... In making a determination as to the correct datum, Congressional intent (authorization documents) should be considered.” The EM also states “If the tidal datum that is used is different from mllw, a diagram should be included on the drawings to indicate the relationship between the project datum (underlining added by present authors) and mllw. The relationship to NGVD 29 should also be shown.” Presumably, based on more recent guidance in ETL 1110-1-152 (USACE 1994), the relationship to NAVD 88 should now be shown.

It is clear that guidance provided by USACE technical documents holds provision for definition of project navigation datums, where warranted. If it is not feasible to determine mllw or if it is technically unsound to employ mllw as a navigation datum, then USACE Districts have the authority to develop an appropriate navigation datum. This project datum must be related to mllw or NOS chart datum, if available, for consistency between Federal agencies and in publishing Federal maps and charts.

Since implementation of NGVD 29, the Texas coast has undergone substantial geomorphic change under the influence of natural and human forces that have altered both the relative location of the water level with respect to land and the range of water-level variation. Along the Texas coast, since the beginning of water-level gauging by NOS and its predecessor organizations (Coast Survey, Coast and Geodetic Survey) in

the early 1880s, sea level along the Texas and Louisiana coasts has been rising, relative to the land, in great part due to subsidence (Swanson and Thurlow 1973). The rate of relative sea-level rise varies along the Texas coast, but has been measured to be on the order of several millimeters per year (Swanson and Thurlow 1973; Lyles, Hickman, and Debaugh 1988), depending upon location. Relative changes in land-water elevation will directly alter water-level datums at the site of inland-water and coastal operational activities of CESWG, and these changes must be tracked through water-level gauging to fixed benchmarks on land. The National Research Council (1987) has published a monograph discussing the engineering implications of sea-level rise.

Determination of the relation of mlt or of another navigation datum to extreme annual low water level, as well as to mllw as required, will enable CESWG to assure the proper navigable depth, while satisfying Federal-wide and USACE policy. The complex water-level variations present on the Texas coast and along its inland coastal waters necessitate measurement of local water level and collection of long-term time series of measurements. Operational requirements in support of dredging activities call for real-time reporting of the data in many situations.

## **Cost-Sharing Partners and the Needs Assessment**

The State of Texas, through sponsorship by the Texas General Land Office (TGLO) and the Texas Water Development Board (TWDB), has deployed and operates a system of tide gauges called the Texas Coastal Ocean Observation Network (TCOON) (Michaud, Thurlow, and Jeffress 1995). TCOON is maintained to national standards and procedures established and promulgated by the NOS. TCOON complements eight NOS gauges presently operating on the Texas coast. As of September 1996, the TCOON consisted of some 40 gauges, most of which were located in inland coastal waters, with three gauges located offshore near the fairway of the Galveston Ship Channel and sponsored by CESWG. The main purpose of the TCOON has been to provide water-level information to the TGLO for marine boundary determination (boundary between state-owned land and private land) and to the TWDB for its estuary and bay circulation and salinity studies.

The TGLO has proposed that the CESWG become a cost-sharing partner of the TCOON, through which the needs of the District for water-level information can be met. The cost-sharing partnership would support the backbone of primary stations (long-term observations) and subordinate stations (short-term observations – on the order of 3 months to 3 years) upon which the programs of all agencies would depend. The partnership must also consider specific gauges and special requirements identified by CESWG as necessary to conduct its missions.

Water-level measurement needs of the CESWG in support of its navigation channel maintenance, coastal engineering, and regulatory functions will not always coincide with those of the state agencies of Texas in their marine boundary definition and environmental modeling activities. On the other hand, all potential users of water-level information will require a certain backbone of primary gauges and infrastructure of personnel and equipment to support their needs. It is appropriate and cost-effective to share financial and technical responsibility for a combined state and Federal measurement system for water level. As much as possible, the water-level measurement system should address the widest possible community needs while maintaining national standards.

## **Objectives**

The overall objective of the present study was to define the requirements or needs of CESWG for water-level and associated information along the Texas coast. This report supersedes an interim working report submitted to CESWG on 30 September 1996. Major elements of this needs assessment are:

- a. Locate and map existing CESWG tide staffs and document existing differential leveling connections with NGVD 29 for providing continuity with future water-level gauging.
- b. Determine the general locations and numbers of water-level gauges required to support CESWG operations.
- c. Identify the types and forms of water-level information, such as method of access during ongoing dredging activities and subsequent archival and retrieval methods.

- d. Conduct proof-of-concept pilot projects to deliver real-time data on water level to CESWG offices.
- e. Make recommendations on alternatives for establishing local project navigation datums that may not be related to the phase of the tide, related to mllw or appropriate chart datum, for CESWG use.
- f. Document results in a report.

The needs assessment encompassed numerous tasks, including: coordination and information gathering with CESWG; inventory of existing CESWG tide staffs; assessment of the need for gauges according to present and possible future activities of the District, leading to development of a preliminary design plan and evaluation of alternatives; reconnaissance of existing and potential sites for water-level gauges; development of recommendations for water-level measurement and communications hardware; and general guidance on time and costs for implementing the recommended plan.

## **Scope of this Report**

Chapter 1 of this report contains the background and objectives of the study. Water-level definitions and the character of the tide along the coast of Texas are discussed in Chapter 2, which includes concepts and nomenclature used throughout the report. Present water-level measurements available along the coast of Texas are given in Chapter 3. Chapter 4 describes communications alternatives for supplying real-time, voice-reported, and archived data to the CESWG. Chapter 5 describes the preliminary design of a water-level network aimed to provide real-time data to the District, as well as to give general access to the database. Chapter 6 contains a summary with main conclusions and recommendations. Appendices contain listings of detailed information developed in this needs assessment.

# 2 Water Level Definition, Measurement, and Properties

---

This chapter introduces basic nomenclature related to tidal datums and water-level measurement. Some typical characteristics of the water level observed on the Texas coast are compared to those from tide records on the Atlantic Ocean and Pacific Ocean coasts of the United States. The material is intended to provide a background for further technical discussion and to serve as motivation for establishing an appropriate navigation datum for the inland coastal waterways of Texas.

## Historical Setting

Tidal datums and their application have been an issue in the United States since the founding of the nation. Both the need to establish a line of delineation between the land and sea interface and the appropriate method for determining the proper elevation were addressed early by the nation.

In 1807, the U.S. Congress assigned to the Coast and Geodetic Survey the tasks of delineating the sea-land interface and displaying it on charts (Shalowitz 1964). That agency, apparently having most experience on the U.S. east coast (where the astronomical tide is very regular), concluded that the most appropriate way of determining that interface or line would be by measurements of the rise and fall of the tide. This procedure entailed setting of a tide gauge, which was connected by differential leveling to fixed points on the land that could be used by engineers to survey the sea-land interface for charting. These procedures have

essentially continued, with some modification, throughout the history of the country. Eventually, a national network of permanently operating water-level measurement stations was established to support the charting activity.

Long-term tidal measurements from the U.S. Coast and Geodetic Survey were the basis for establishing a boundary indicating ownership between private upland and sovereign submerged lands (the landmark case *Borax Consolidated, Ltd. vs. Los Angeles*, circa 1935; see Shalowitz (1964)). The result of this decision by the U.S. Supreme Court was carried over by the state courts to be the accepted method for dealing with boundary issues. An 18.6-year water-level record, which corresponds to a complete cycle of progression of the moon's nodes along the ecliptic (described by Meton in the fifth century before Christ), is believed to account for all the astronomical variations in the ranges of the tide.

Also, it was believed for many years that the tides rose and fell periodically and the application of a mean high water was appropriate for all coastal waters. However, as more long-term tide stations have been operated throughout the United States, we have found that the astronomical gravitation is not always dominant. The tidal force is frequently exceeded by meteorological forces, acting both over the long term (seasons) and in the short term (hours and days through strong winds and changes in air pressure accompanying passage of weather fronts). Meteorological forcing can be particularly significant in shallow-water bodies, such as along the Texas coast. Observations from the TCOON have clearly shown that tidal datums established through traditional procedures are not well-suited within the bays and estuaries along the Texas coast for boundary, regulatory, or navigational purposes.

## **Water Level and Tidal Datums**

This section reviews key concepts and notation relevant to the needs assessment. Definitions of tidal datums and associated nomenclature and concepts can be found in the NOS "Tide and Current Glossary" (Hicks 1989), in a USACE Special Report (Harris 1981), in the USACE Engineer Manual entitled "Water Levels and Wave Heights for Coastal Engineering Design" (USACE 1989), and in the EM entitled "Hydrographic

Surveying” (USACE 1991). A concise but authoritative overview of tidal datums and their various uses is given in Hicks (1985, 1986).

### **Basic concepts of tides and tide measurement**

The tide is defined by NOS as the periodic rise and fall of the water resulting from gravitational interactions between the sun, moon, and earth (Hicks 1989). The term “tide” refers to the astronomically forced changes in water level, which is deterministic or predictable. Astronomical or *daily tide* should be distinguished from other contributions to changes in water level, including meteorological forcing (seasonal changes in sea level, changes caused by daily wind or to passage of weather fronts, etc.), terrestrial inputs (rain runoff or river discharge), and atmospheric forcing (change in air pressure). The distinguishing of periodicity produced by astronomical forcing and by diurnal and longer-term wind forcing, for example, has not been well addressed in tidal datum definition. Similarly, the distinguishing of variation in daily water (tidal) level and in annual water elevation does not seem to have been well addressed in the United States with regard to definition or determination of a navigation datum. In the following, standard NOS definitions for selected tidal datums are given for reference in this report.

**Low water** is the minimum height reached by a falling tide. Low water occurs according to the periodic tidal forces and the acting meteorological, hydrologic, and oceanographic conditions. For tidal datum computation, the minimum height is not considered a low water unless it contains a tidal low water (Hicks 1989).

**Mean high water (mhw)** and **mean low water (mlw)** are, respectively, the averages of all the high-water heights and low-water heights observed over the NTDE. For stations with time series shorter than 19 years, simultaneous comparisons with a control station are made to determine the equivalent datum of the NTDE. Also, strictly speaking, to be counted as a high, each high water must be 0.10 ft or more above, and must occur 2 hr or more later than the adjacent low waters. Analogous considerations hold for definition of low waters.

The **mean range of tide**, denoted as “Mn” by NOS, is the difference in height between mhw and mlw. Thus, Mn corresponds to a tidal range

defined in terms of *daily* highs and lows and does not include such changes as a seasonal variation in water elevation. Note that Mn is not a tidal datum because it is not an elevation or level, but a range. **Mean Tide Level** (mtl) or “half tide level” is a tidal datum and is the arithmetic mean of mhw and mlw. The mtl may lie above or below msl by an amount depending on the relative amplitudes of the diurnal (having a period of approximately 1 lunar day) components of the tide.

**Mean higher high water** (mhhw) and **mean lower low water** (mllw) are, respectively, the averages of the higher high water heights and lower low water heights of each tidal day (or lunar day; 24.84 solar hr) observed over the NTDE. For example, if there are two lows in a tidal day, the lower of the two is used to compute mllw for that day. The mllw is presently used by NOS as a nautical chart datum.

### **Tide gauge and tide station**

A **tide gauge**, or water-level gauge in a more general sense, is an instrument for measuring the rise and fall of the tide or water level. Presently, acoustic gauges and pressure gauges are used as automated water-level measurement systems because of their reliability and capability to produce an electronic signal for convenient processing. These measurement systems also require little power and are suited for remote sites where the power unit must be self-contained. A **tide staff** is a simple form of tide gauge and consists of a vertical graduated staff from which the height of the water can be read visually.

A **tide station**, or water-level station in a more general sense, is the geographic location at which tidal or water-level observations have been made. The defining aspect of a tide station is the presence of a system of (tidal) benchmarks, which are fixed physical objects (typically, deep-driven rods) that serve as a reference for a vertical datum. The tidal benchmarks are central to water-level measurement because the relation between elevation of the land and water can be tracked through time, the benchmarks providing the fixed reference (in the absence of subsidence or crustal movement in general). Water-level measurement without reference to benchmarks cannot produce recoverable tidal datums.



## Zoning

Zoning is a procedure in which the project area of a hydrographic survey is divided into sections or “zones” to account for differences in tidal ranges and phases within the area. In the hydrographic survey, adjustments or “reducers” are applied to the depth soundings, which are taken at all stages of the tide, to reference them to a common datum. The correction must also allow for the time differences between the survey area and the water-level gauge used for the control. Tidal zones are distinguished by keeping two properties, range of tide and phase of tide, within certain limits, typically 0.2 ft and 0.2 hr, respectively (Hicks 1989). However, as stated by Hicks (1989), “these limits are subject to change, depending upon survey accuracy, location, and tidal characteristics.” In the case of Texas inland coastal waters, not only the astronomical tide, but also wind forcing, must be considered in the zoning.

## Character of the Tide Along the Texas Coast

Characteristics of the tide along much of the Gulf of Mexico are different than those on the Atlantic Ocean and Pacific Ocean coasts. Even within the Gulf of Mexico, tidal characteristics are variable from one locality to another within short distances. Prior to the 1950s, there were only a few locations where long-term tidal measurements had been made. Although diurnal high and low waters occur only during the extreme north and south declinations of the moon, the tides were classified as diurnal in character. The mlw was therefore used as the reference datum for hydrographic surveys.

As more systematic tidal observations were made in the coastal waters of the Gulf of Mexico, it became evident that the classification of semi-diurnal tides for the entire Gulf was not defensible. Although many areas have two high and two low waters most of the time, there are nearby areas where only one high and one low water occur. This observation led to the creation of the Gulf Coast Low Water Datum (GCLWD) for the NOS Nautical Charts. The GCLWD is defined as: mllw when the type of tide is mixed, and mlw when the type of tide is diurnal. The National Tidal Datum Convention of 1980 (Hicks 1980) established one uniform,

continuous tidal datum system for all marine waters of the United States and replaced the GCLWD by mllw, among several other actions.

Figures 2-7 are plots of the year-long hourly water-level records at representative tide gauges on the Pacific, Atlantic, and Gulf coasts. These include two inland coastal stations of Texas, the South Padre Island Coast Guard Station located at the southern end of the Laguna Madre, and Packery Channel located at the northern end of the Laguna Madre near its entrance to Corpus Christi Bay. The figures are plotted to the mllw datum of each station, and the respective values of mhw and mlw are given in the upper right corners of the plots.

Figure 2 for Los Angeles, California, shows a clear signal of the approximate 14-day neap and spring tide cycle corresponding to the phases of the moon. By its definition as an average, there must be times when the water level falls below mllw; for Los Angeles, this occurs at a fairly regular periodic cycle corresponding to the times of spring tide, when the moon is either new or full. Ships waiting to proceed into or leave a port could consult tide predictions with reasonable confidence to determine safe clearance under keel for a given draft according to load. Overall, the water level at Los Angeles is fairly symmetric with respect to the mtl. Little seasonal trend appears in the yearlong record.

Figures 3 and 4 show yearlong records for Sandy Hook, New Jersey, and Fernandina, Florida. The water level is not as pronounced in spring-neap cycle as is that of Los Angeles, in part due to the mixed character of the tide and also to the action of storms on the gently sloping continental shelf of the Atlantic coast as compared to the Pacific coast. Water level falls below mllw in a somewhat less regular manner than at Los Angeles. A slight seasonal trend of lower waters in winter is observed. For the Atlantic- and Pacific-coast gauge records, the body of measurements stays well and regularly within the mean range of tide defined by the mhw and mlw lines drawn in the figures. At both locations, the deviation below mllw is typically 20 to 25 percent of the range.

In contrast to the Atlantic- and Pacific-coast water-level records, the record from Bob Hall Pier, Corpus Christi, Texas, on the Gulf of Mexico (Figure 5), is irregular, with the seasonal trend change in water elevation comparable to or exceeding the daily change in tide. Further, the deviation

below mllw is typically on the order of 50 percent of the range and sometimes equals or approaches the range in 1995. Although a spring-neap cycle is evident, local nonastronomical tidal forcing makes the cycle appear irregular. Similar observations hold for the South Padre Island Coast Guard Station gauge, which is located near the Brazos-Santiago Pass and ship channel (Figure 6).

Figure 7 displays a year-long record for Packery Channel, which is located just off the GIWW in Corpus Christi Bay, on the bay side of Padre Island and nearly opposite to the Bob Hall tide gauge. Strong seasonality in the water level is apparent, and, in 1995, the water level remained below mllw for approximately 1 month starting in mid-January. Further, the deviation in water level below mllw was typically equal to the mean range of tide and even reached twice the mean range below mllw. This record indicates a need for a navigation datum that accounts for seasonal lows and that is not based on a simple average of daily water-level lows.

MHW = 4.77 ft  
-----  
MLW = 0.95 ft

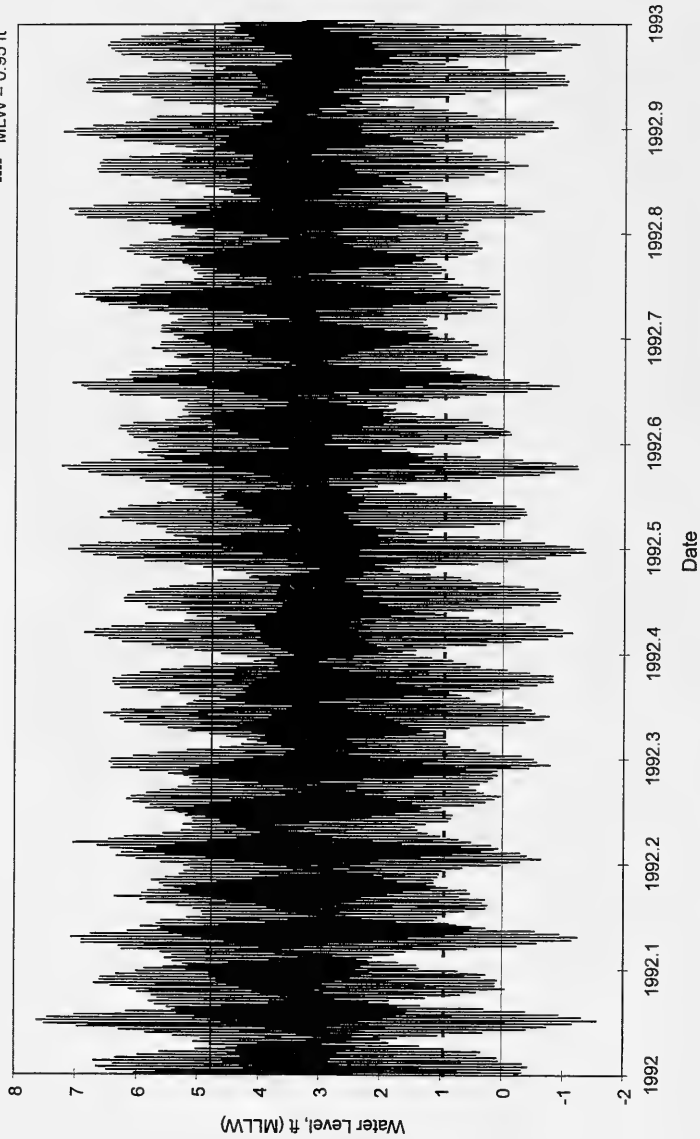


Figure 2. 1992 water level for Los Angeles, California

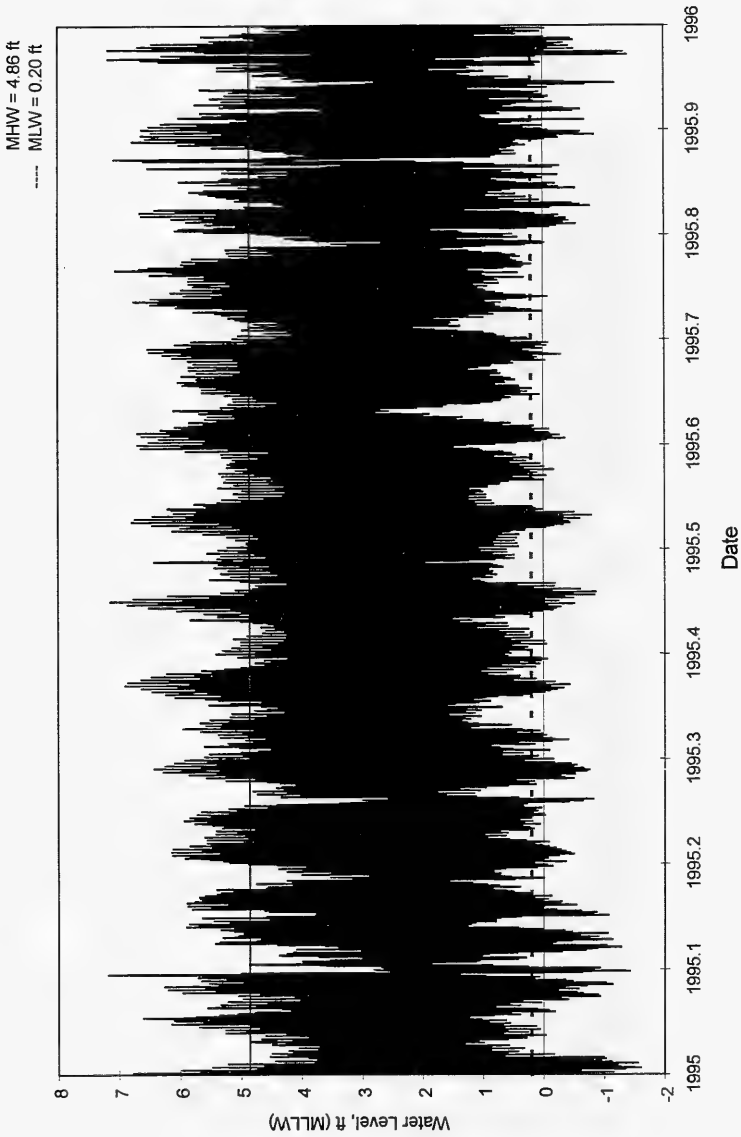


Figure 3. 1995 water level for Sandy Hook, New Jersey

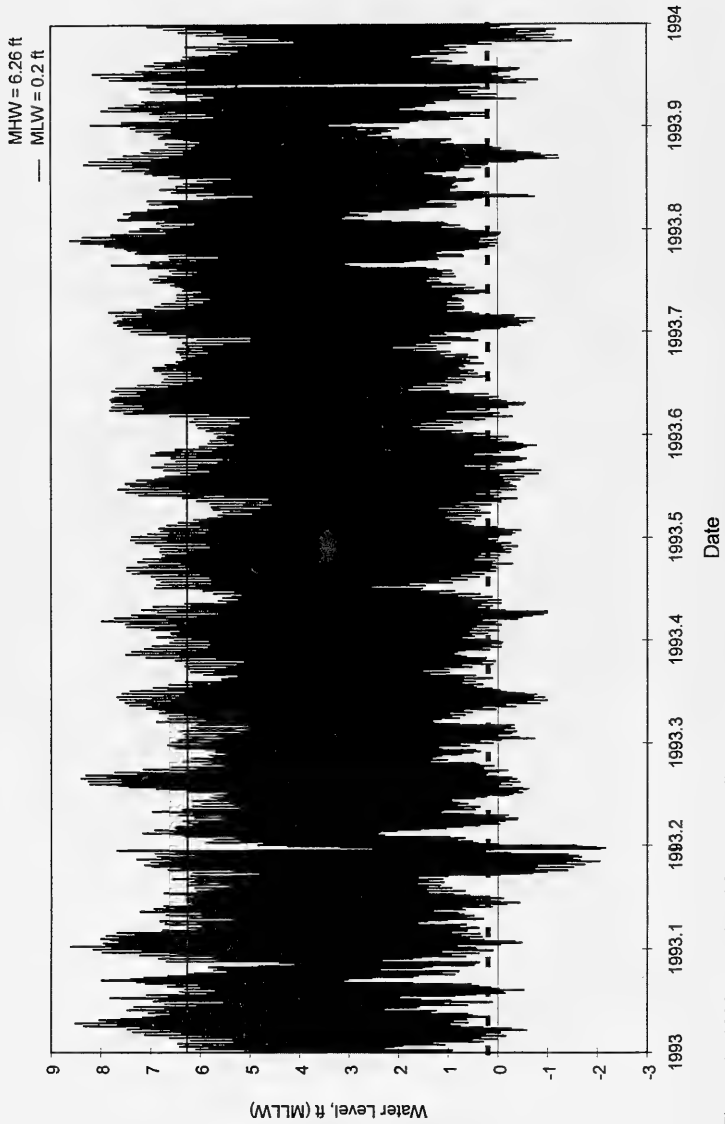


Figure 4. 1993 water level for Fernandina, Florida

MHW = 1.59 ft  
----- MLW = 0.25 ft

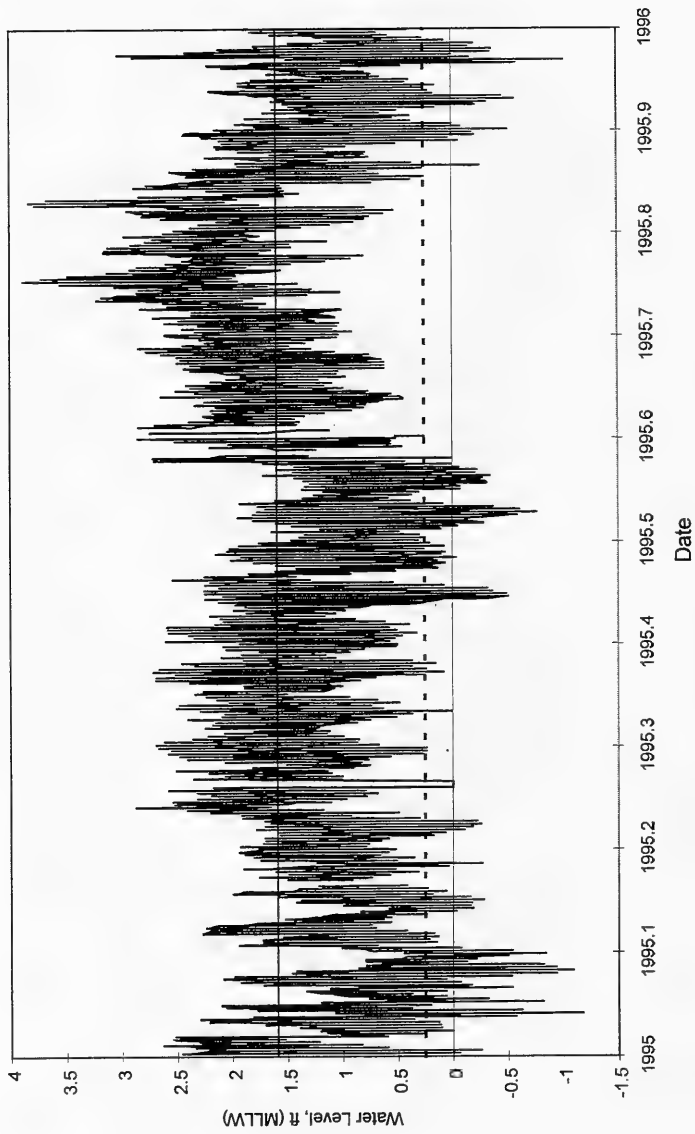


Figure 5. 1995 water level for Bob Hall Pier, Texas

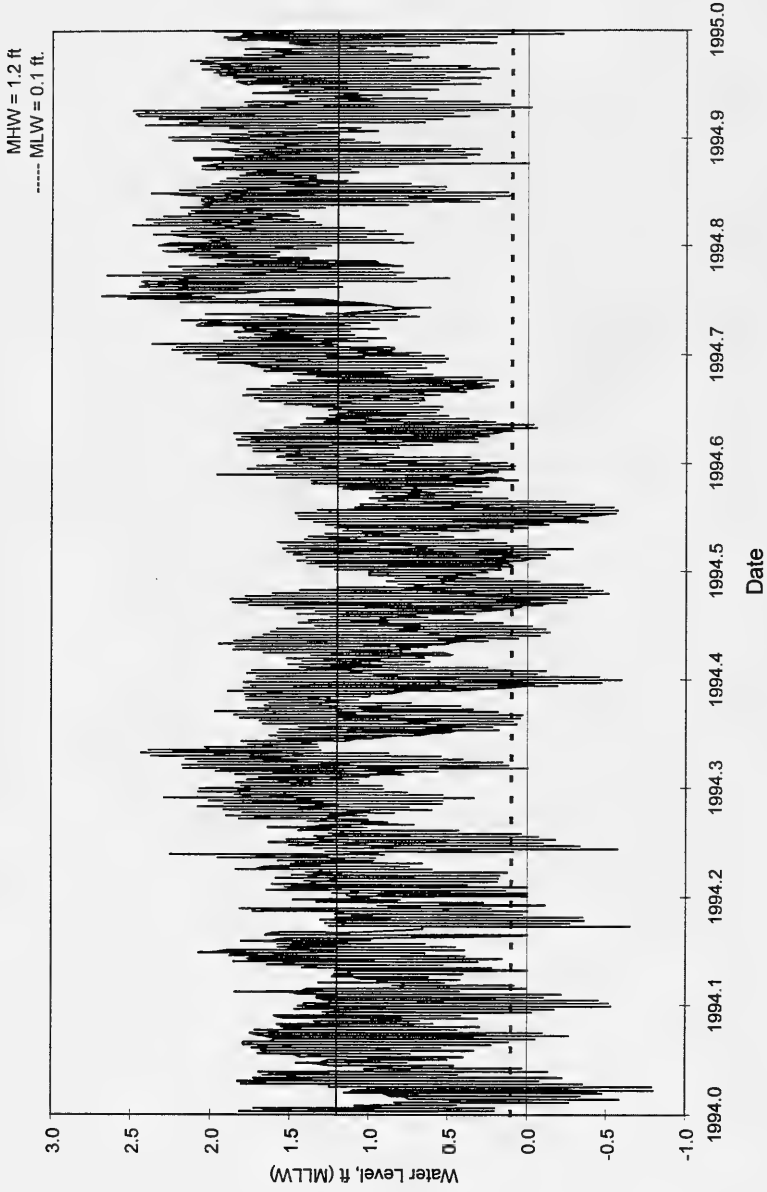


Figure 6. 1994 water level for S. Padre Island Coast Guard Station



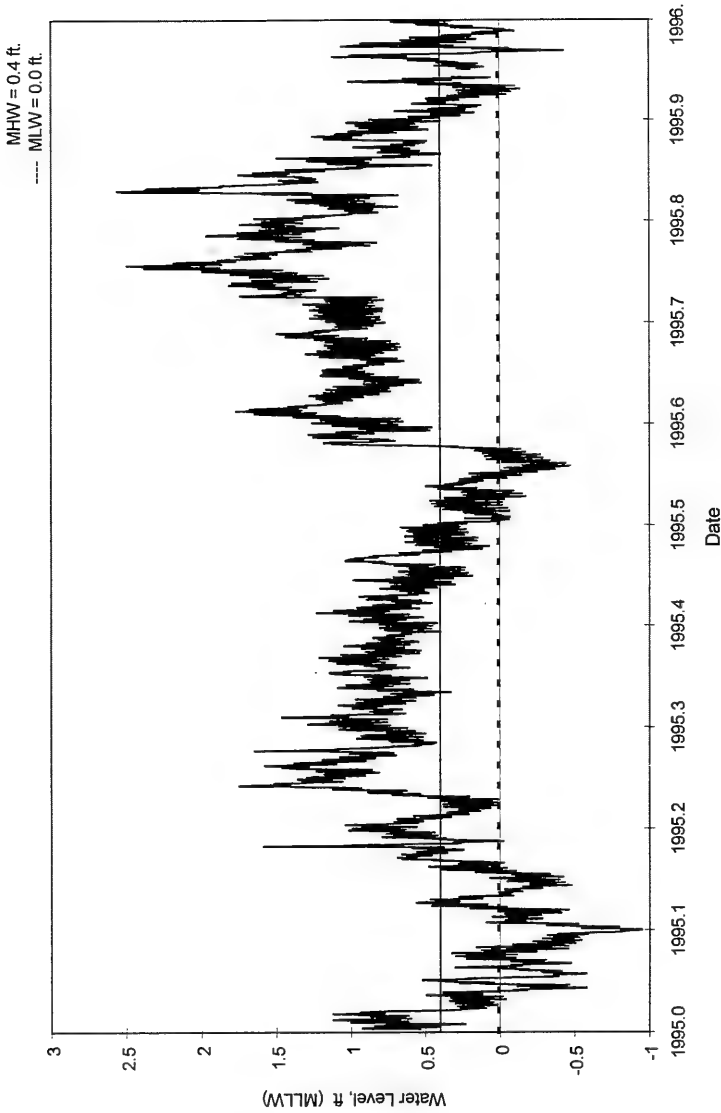


Figure 7. 1995 water level for Packery Channel, Texas

# **3 Present Water-Level Measurement Networks Along the Texas Coast**

---

This chapter summarizes the status of TCOON water-level measurement and of CESWG water-level measurement as practiced by its field offices and hydrographic survey parties. The status is current to September 1996, with some updates. The summary introduces basic District operational needs as an outcome, which would include the needs of Government contractors.

## **TCOON Capabilities**

The TCOON presently consists of approximately 40 water-level stations. On or near the coast, eight NOS gauges serve as long-term control stations. Table A1 in Appendix A summarizes the status of the TCOON and NOS tide stations.

## **Present Galveston District Field Practice and Identified Needs**

The CESWG tide staffs are presently central to its hydrographic surveys. Examples of two staffs are given in Figures 8 and 9. It is standard procedure to take the survey boat to a tide staff to record water level at the start of the day's survey (typically early morning), mid-morning, noon, mid-afternoon, and when quitting for the day. At the tide staff, the survey boat will check its echo sounder and note the elevation of the water on the staff and the time. In surveys of long channels, during a

typical survey day, the boat may have to visit several different tide staffs located along the channel, depending on the rate of coverage of an area, or station a survey crew member at the nearest staff to regularly report water elevation via radio. A high density of staffs in some water bodies probably reflects as much the need to reduce transit time to and from staff visits as recognition that the water-level elevation changes along a water body.

Boat visits to the staffs can consume substantial time in going off station, remaining at the staff for several minutes, and then returning on station. An operational problem sometimes encountered is difficulty in visually reading the tide staff in moderate waves and wind, which can cause trouble in keeping the boat stationary at the staff.

The tide staffs, which are typically mounted on timber survey platforms, channel markers, bulkheads, etc., are routinely replaced as the mounting structures are destroyed by barges or other vessels. Re-installation of the staffs at the correct elevation often requires performance of a level survey (if the tide station is near land or a survey table) or knowledge of the water level based on a reading made at a nearby staff. Figure 10 shows a staff being replaced by a Southern Area Office surveyor.

In discussions with CESWG hydrographic survey party personnel, several operational needs were identified. Survey boats could remain on station and continue surveying if the operators could simply phone to a gauge and obtain the water level. The information reported by the gauge must be in standard units (feet, local time), and a repeat option should be available because of occasional noise or loss of attention due to other duties on the survey boat. The water level should be reported in terms of the CESWG navigation datum (presently mtl), or a table for converting from the reporting datum to the navigation datum should be provided (e.g., mllw to mlt).

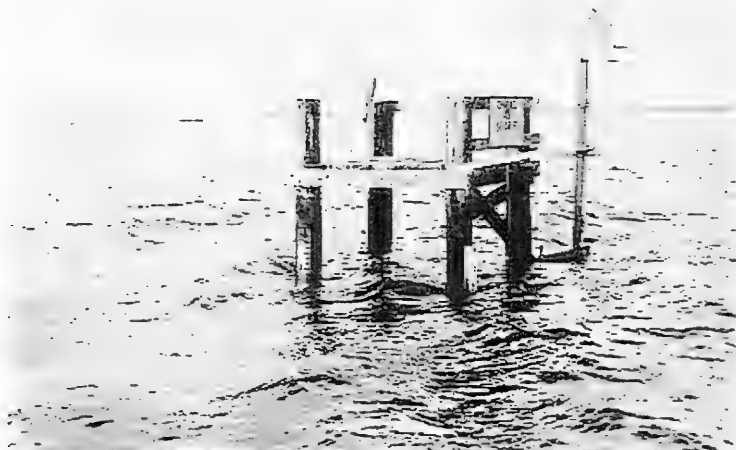


Figure 8. Tide staff mounted on survey table at Channel to Victoria (see Staff 8, Chart G, Appendix B). A dredging contractor's staff is mounted on the third pile from left

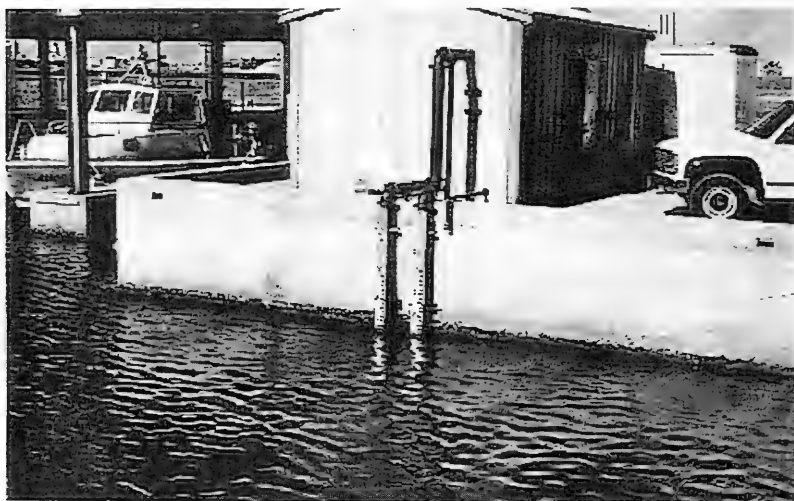


Figure 9. Freeport Entrance Channel at the U.S. Coast Guard Station, Surfside (see Staff 3, Chart E, Appendix B). The staff on the left is referenced to mlt, and the staff on the right is referenced to msl



Figure 10. Staff being replaced at Fulton Harbor public boat ramp, Aransas Bay (see Staff 5, Chart G, Appendix B)

At the office, the survey parties would benefit from ready availability of a hard copy of the water-level record during the time they were onsite for confirmation of the voice record and for documentation. The most convenient way would be through facsimile; however, they would have interest in downloading via the Internet, such as from a World Wide Web (WWW) site, if they received training and equipment to do so.

In addition, the CESWG and its field offices are routinely asked to provide water-level data or these offices themselves need water-level data for varied reasons, including response and analysis of boating accidents and responses to oil spills. Convenient access to hard copy or archived data reaching back several months would usually satisfy most such needs.

Finally, interest was expressed in certain topics in related areas. A primer (handbook) providing explanations of water levels and their inter-relations was thought to be useful if not essential. The water-level information should be given in local time and to the navigation datum, not, say, to Greenwich Time or to an arbitrary staff datum that requires further conversion. Information on wind and current, although not typically

entering directly in routine surveying operations, was sometimes needed for evaluating claims of bad weather by dredging contractors and for analyzing the circumstances concerning boating accidents.

In the offshore, information on wave height, period, and direction, as well as water level, would be valuable for confirmation of weather days that halt dredging. Dredgers sometimes appear to have to halt due to longer period wave motions than just short-period surface waves; a wave gauge might be able to determine the conditions when this problem occurs. Finally, some interest was expressed in being able to obtain predictions of the tide, both for planning routine operations and for emergency planning during hurricanes and storms.

## **Locations of Galveston District Tide Staffs**

After creating preliminary maps showing general locations of tide staffs based on information provided by the CESWG Area Offices, 13 days of field reconnaissance were conducted during September and October 1996, of the CESWG tide staffs from Port Arthur to Brownsville. The locations (geographic coordinates and description) of the staffs were determined by differential global positioning system (DGPS) or global positioning system (GPS) survey, depending on satellite coverage at the time the particular stations were visited.

A list of the locations of 166 CESWG tide staffs identified during the survey is contained in Appendix B. In several cases, the tide staffs were missing at the time of the survey, and station coordinates (for staffs to be later replaced) were obtained based on knowledge of the former staff location as provided by the Area Office field personnel who served as guides during the field visits. Maps showing tide station locations were generated as shown in Charts A-J in Chapter 5 and were designed to cover areas of the coast corresponding to areas covered by specific NOAA charts.

## MLT and NGVD Difference

The differences between the mlt datum and NGVD 29 are listed in Table 1, as provided by personnel of CESWG. Many of these differences were determined in the 1960s and 1970s.

| <b>Water Body</b>             | <b>Reach</b>                                   | <b>mlt as Feet Below<br/>NGVD 29</b> |
|-------------------------------|--|--------------------------------------|
| GIWW-Main Channel             | Port Arthur - High Island                      | 1.1                                  |
| GIWW-Main Channel             | High Island – Bolivar                          | 0.5                                  |
| GIWW-Main Channel             | Galveston – Matagorda                          | 1.4                                  |
| GIWW-Main Channel             | Matagorda - Port Mansfield                     | 1.0                                  |
| GIWW-Main Channel             | Port Mansfield - Port Isabel                   | 0.9                                  |
| Sabine Neches Waterway        | Sabine – Orange                                | 0.8                                  |
| Houston Ship Channel          | Bolivar – Lynchburg                            | 1.4                                  |
| Houston Ship Channel          | Lynchburg - Main Street                        | 1.1                                  |
| Cedar Bayou                   | Cedar Bayou Channel                            | 1.4                                  |
| Trinity River                 | Trinity River Channel                          | 1.0                                  |
| Ear Creek                     | Ear Creek Channel                              | 1.3                                  |
| Dickinson Bayou               | Dickinson Bayou Channel                        | 1.4                                  |
| Galveston Bay                 | Galveston Harbor – Texas City Chnl.            | 1.4                                  |
| Chocolate Bayou               | Chocolate Bayou Channel                        | 1.4                                  |
| Bastrop Bayou                 | Bastrop Bayou Channel                          | 1.4                                  |
| Freeport Harbor               | Freeport Harbor                                | 1.4                                  |
| Brazos River - Colorado River | Brazos River Floodgates - Colorado River Locks | 1.4                                  |
| Palacios - La Quinta Channel  | Palacios - La Quinta                           | 1.0                                  |
| Brazos Island Harbor          | Brazos Island Harbor – Brownsville             | 0.9                                  |
| Port Isabel                   | Port Isabel                                    | 0.9                                  |

## 4 Communications Alternatives

---

This chapter is concerned with communications alternatives for real-time reporting and for access to archived data in a database. New equipment and capabilities are constantly reaching the market, so an existing-market search would need to be done at time of implementation.

### Real-Time Reporting

Table 2 compares alternatives presently available for real-time voice reporting of water level and related information. Certain instrument manufacturers sell proprietary turnkey measurement systems that include radio communication, which were not investigated here.

| Feature                  | Sutron Board    | Sphere Reporter                    | Dialogic Netware | Voice Modem UNIX             |
|--------------------------|-----------------|------------------------------------|------------------|------------------------------|
| Annual maintenance costs | Phone Charges   | Phone Charges                      | PC Cost, phones  | PC Cost, Phones              |
| Capability (# Users)     | 1               | <sup>2</sup><br>(Phone/Radio)      | Up to 32         | Up to 32                     |
| Expandability            | Minimal         | Moderate                           | Minimal          | Good                         |
| Stand-alone or networked | Stand Alone     | Stand Alone                        | Networked        | Networked                    |
| Type of connection       | Cell/Land Phone | Cell/Land Phone, plus marine radio | Cell/Land Phone  | Cell/Land Phone, Data Radio  |
| Voice vocabulary         | Minimal         | Moderate                           | Limited          | Good                         |
| Voice quality            | Minimal         | Good                               | Good             | Good                         |
| Voice speed              | Minimal         | Moderate                           | Moderate         | Good                         |
| Fax or other medium      | Text Terminal   | None                               | Text Terminal    | Fax, Text Terminal, Graphics |



Summary descriptions of the equipment are as follows:

**Sutron board:** Modular circuit board that plugs into any Sutron tide gauge station. Access is via telephone. If the gauge is at a remote location, a cellular phone with land line simulator is required.

**Sphere reporter:** Small external circuit connects to any Sutron tide gauge via data port. Access is via telephone or marine radio. If the gauge is at a remote location, a cellular phone with land line simulator is required. The marine radio will provide a report automatically every 5 to 10 min on VHF Channel 13. The manufacturer is located in Australia, and some difficulty was noted in provided changes in voice vocabulary; however, the Sphere system appears to be very flexible.

**Dialogic Netware:** Centralized personal computer (PC) is used. Users call this PC to hear high quality stored speech. The PC communicates with tide gauges via a separate phone or by data radio. This alternative is more costly than either the Sutron board or Sphere reporter, but higher speech quality, alerting capabilities, etc., can be built in. Altering the messages requires recording new phrases in a studio and installing them on the system.

**Voice Modem/UNIX:** This is an evolution of the Dialogic Netware system and is currently being actively developed at the Conrad Blucher Institute (CBI) for its "FlowInfo" systems. Users call a central PC to hear high-quality digitized speech. The PC communicates with tide gauges via a separate phone or by data radio. Changes to the messages are conveniently made by editing text files. Such changes may be done locally or remotely via secure dial-in modem.

## Recommendations and Costs

At present, the following recommendations are made, but should be reviewed and revised prior to implementation. To access a particular tide gauge via telephone, a Sutron board is recommended. If radio reporting is desired, a Sphere reporter would be installed. To provide voice reports to telephone callers from gauges in a particular area, installation of a centralized PC is recommended. Currently, CBI would use the Voice

Modem/UNIX system. Table 3 gives estimates of costs of hardware and labor, exclusive of labor for procurement, testing, and initial deployment.

| <b>Table 3</b>   |                      |                            |         |         |                 |
|--|----------------------|----------------------------|---------|---------|-----------------|
| <b>Estimated Cost of Stand-Alone (per gauge) Voice-Reporting Systems</b> |                      |                            |         |         |                 |
| System   | Base Cost            | Phone                      | Labor   | Total   | Remarks         |
| Sutron Board   | \$1,200              | \$250 (Land)               | \$1,000 | \$2,450 | Monthly charges |
| Sutron Board   | \$1,200              | \$2,000 (CMT) <sup>1</sup> | \$1,000 | \$3,200 | Per minute fee  |
| Sphere   | \$1,200              | \$ 250 (Land)              | \$1,000 | \$2,450 | Monthly charges |
| Sphere   | \$1,200              | \$2,000 (CMT) <sup>1</sup> | \$1,000 | \$3,200 | Per minute fee  |
| Radio <sup>2</sup>   | \$1,000 <sup>2</sup> |                            |         |         |                 |

Includes phone, batteries, solar panels, enclosure, antenna, landline simulator, etc.  
 Does not include overhead, handling, and other indirect costs.  
<sup>1</sup>Includes radio, antenna, batteries, solar panel, enclosure, antenna. Range is 5-10 miles per FCC rules.  
<sup>2</sup>Radio may be added to a Sphere with either Land or CMT phone, or installed without either type of phone.

### Centralized PC System:

Because of a wide variety of possible configurations, costs will vary widely. A rough estimate of costs is as follows, not including indirect costs:

|   |                |
|---|----------------|
| Basic PC, speech hardware                         | \$4,000        |
| Operating system                                  | FREE (LINUX)   |
| Speech software                                   | \$2,000        |
| Basic installation                                | \$1,000        |
| Phone company installation (3 lines)              | \$ 750         |
| <u>Data radio system (to retrieve gauge data)</u> | <u>\$1,500</u> |
| Total   | \$9,250        |

(approximate)

Table 4 gives a listing of tide gauges possessing voice-reporting capability as of 30 December 1996.

**Table 4  
Gauges With Speech Capability, December 1996**

| Station Name                          | Station ID Number | Phone Number | Location (Lat/Long) |
|---------------------------------------|-------------------|--------------|---------------------|
| Mesquite Point                        | 877 05391         | 409-781-9831 | 29 46.0' / 93 53.7' |
| Chocolate Bayou                       | 877 17081         | 409-781-7195 | 29 12.7' / 95 12.4' |
| Eagle Point                           | 877 10131         | 409-656-4069 | 29 29.9' / 94 54.7' |
| Rollover                              | 877 09711         | 409-781-7193 | 29 30.9' / 94 30.8' |
| Morgan's Point                        | 878 06131         | 713-470-9739 | 29 40.6' / 94 59.1' |
| Beaumont                              | 877 05951         | 409-656-2670 | 30 05.7' / 94 05.4' |
| Texas State Aquarium at Harbor Bridge | CBI90008          | 512-881-1266 | 27 40.8' / 97 23.5' |
| Ingleside                             | 877 52831         | 512-776-6934 | 27 49.3' / 97 12.5' |
| Port Aransas                          | 877 52371         | 512-815-4049 | 27 50.4' / 97 04.4' |

All gauges presently use the Sutron board and report water levels to mllw.

## Access to Archived Data

Historic and daily data for the TCOON and NOS gauges in Texas may be retrieved via the Internet using any standard WWW browser package. The data are typically as recent as 3 hr old when received at CBI. Options which may be selected by the user include: (a) data from previous week for all sensors at a specified station; (b) any specified time period - days, weeks, months, or years; and (c) multiple stations per graph to compare tide signals. Other capabilities may be added on request.

CBI maintains an up-to-date list of Universal Resource Locators and system capabilities. Two example screens are shown in Figures 11 and 12. Capabilities of the TCOON web page are constantly being improved.

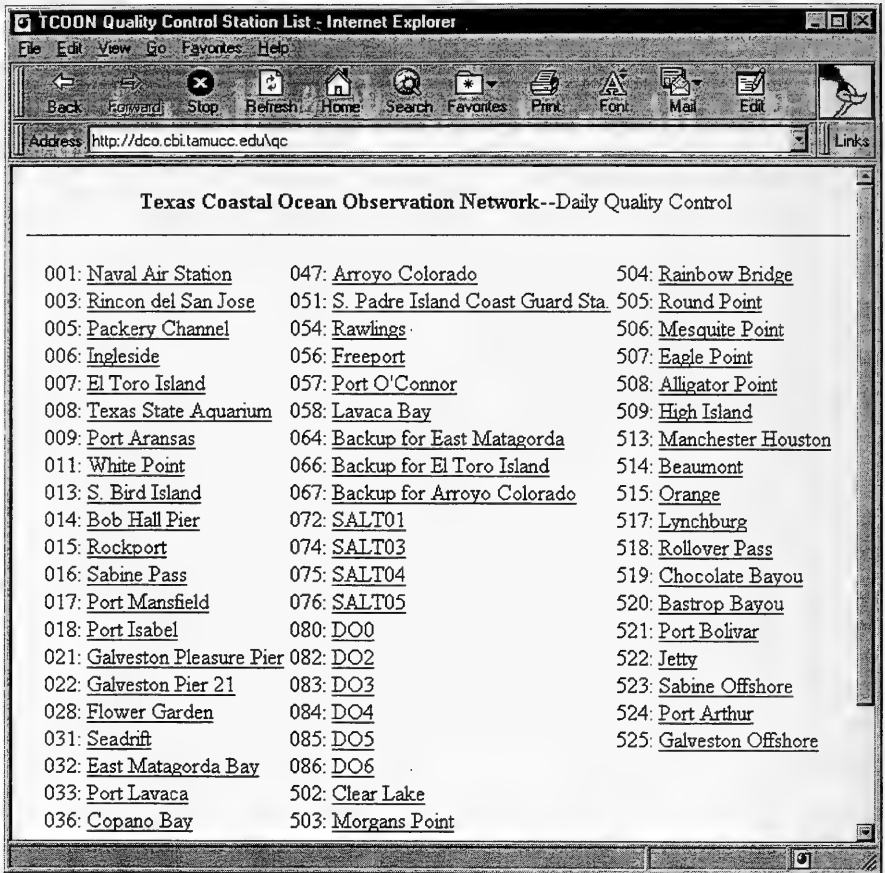


Figure 11. TCOON quality control station list

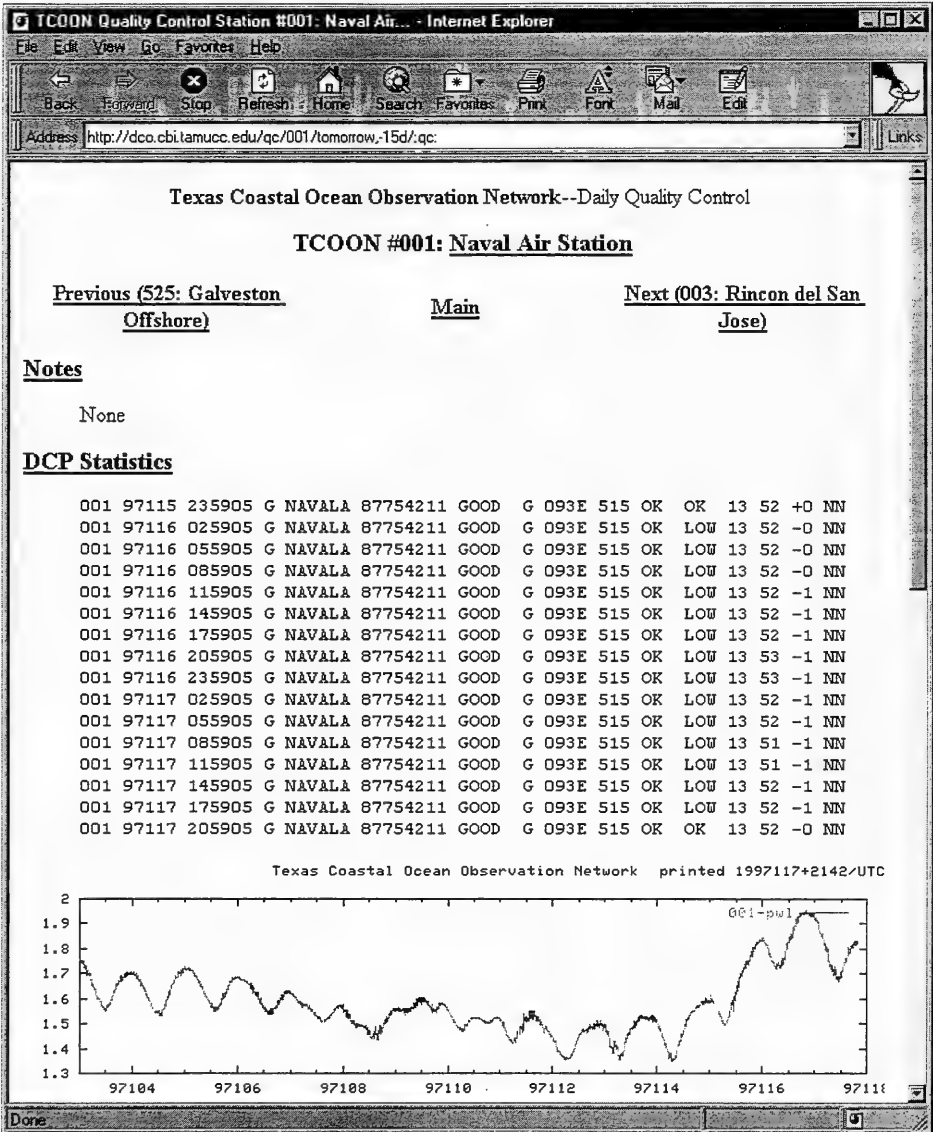


Figure 12. TCOON quality control station 001: Naval Air Station

# 5 Consideration of an Expanded Network

---

This chapter contains information for guiding future detailed planning of the TCOON for CESWG needs.

## **Present Status of Network**

The first step in designing a network is to obtain all historic data available within the area of interest. This information has been obtained and is summarized in Table 5. Maps, which follow in Figures 13-22, show the locations of the gauges, as well as selected CESWG tide staffs. A review of the historic data and the data from the TCOON system reveals a lack of sufficient information for navigational or regulatory purposes for several key areas. These are addressed in the final chapter giving conclusions and recommendations.

**Table 5  
Summary of Water-Level Stations on the Texas Coast and Inland Coastal Waters (as of September 1996)**

| Station Name  | NOS Station Number | TCOON Number | Installed     | Removed           | Water Body           | mhw ft*          | miw ft* | Observed Lowest ft* | Mn ft | NGVD '29 Tie |
|---|--------------------|--------------|---------------|-------------------|----------------------|------------------|---------|---------------------|-------|--------------|
| <b>A. NOS Chart Number 11301</b>                    |                    |              |               |                   |                      |                  |         |                     |       |              |
| Port Isabel   | 877 9770 1         | 18           | 2/91          | --                | Laguna Madre         | 1.33             | 0.19    | -2.86               | 1.14  | N            |
| South Bay, Clark Island                             | 877 9768 1         | 024          | 6/91          | 1/12/93           | South Bay            | 1.30             | 0.20    | --                  | 1.10  | N            |
| South Padre Island                                  | 877 9750 0         | --           | 6/68<br>12/80 | 6/14/79<br>5/5/94 | Brazos Santiago Pass | 1.51             | 0.20    | -1.81               | 1.31  | Y            |
| S. Padre Island, CG Sn                              | 877 9748 1         | 51           | 4/93          | --                | Laguna Madre         | 1.20             | 0.10    | --                  | 1.10  | N            |
| Queen Isabella Causeway                             | 877 9739           | --           | 10/73         | 5/2/78            | Laguna Madre         | 1.17             | 0.12    | -1.11               | 1.05  | N            |
| Queen Isabella Causeway                             | 877 9724 0         | --           | 12/76         | 4/27/78           | Laguna Madre         | 1.24             | 0.16    | -1.22               | 1.08  | Y            |
| Arroyo Colorado                                     | 877 9038           | 47           | 11/92         | --                | Laguna Madre         | NON-TIDAL        | --      | --                  | --    | N            |
| Port Mansfield                                      | 877 8490 1         | 47           | 2/90          | --                | Laguna Madre         | NON-TIDAL        | --      | --                  | --    | N            |
| <b>B. NOS Chart Numbers 11304, 11306, and 11308</b> |                    |              |               |                   |                      |                  |         |                     |       |              |
| Rincon del San Jose                                 | 877 7812 1         | 3            | 3/90          | --                | Laguna Madre         | NON-TIDAL        | --      | --                  | --    | N            |
| El Toro   | 877 7562 1         | 7            | 3/90          | --                | Laguna Madre         | NON-TIDAL        | --      | --                  | --    | N            |
| Yarborough Pass                                     | 877 6887 1         | 4            | 3/90          | --                | Laguna Madre         | NON-TIDAL        | --      | --                  | --    | N            |
| <b>C. NOS Chart Number 11307</b>                    |                    |              |               |                   |                      |                  |         |                     |       |              |
| South Bird Island                                   | 877 6139 1         | 13           | 9/91          | --                | Laguna Madre         | NON-TIDAL        | --      | --                  | --    | N            |
| CC Bob Hall Pier                                    | 877 5870 1         | 14           | 5/89          | --                | Gulf of Mexico       | 1.59             | 0.25    | -1.65               | 1.34  | N            |
| <b>D. NOS Chart Numbers 11308 and 11309</b>         |                    |              |               |                   |                      |                  |         |                     |       |              |
| Packery Channel                                     | 877 5792 1         | 5            | 3/90          | --                | Laguna Madre         | 0.37             | 0.01    | -1.04               | 0.36  | N            |
| Shamrock Island                                     | 877 5422           | 39           | 3/92          | --                | Corpus Christi Bay   | 0.60             | 0.00    | --                  | 0.60  | N            |
| CC Naval Air Station                                | 877 5421 1         | 1            | 11/89         | --                | Corpus Christi Bay   | 0.67             | 0.03    | -0.40               | 0.64  | N            |
| Lawrence Street T-Head                              | 877 5351 0         | 2            | 12/88         | 4/4/91            | Corpus Christi Bay   | 0.60             | 0.00    | --                  | 0.60  | N            |
| Texas State Aquarium                                | 877 5296 1         | 8            | 6/90          | --                | Corpus Christi Bay   | 0.60             | 0.00    | --                  | 0.60  | N            |
| Port Ingelside                                      | 877 5283 1         | 6            | 5/89          | --                | Corpus Christi Bay   | 0.60             | 0.00    | --                  | 0.60  | N            |
| Port Aransas  | 877 5237 1         | 9            | 5/90          | --                | Aransas Ship Chnl    | 0.60             | 0.10    | --                  | 0.80  | N            |
| White Point   | 877 5188 1         | 11           | 7/90          | --                | Nueces Bay           | 0.60             | 0.00    | --                  | 0.60  | N            |
| <b>E. NOS Chart Numbers 11313 and 11314</b>         |                    |              |               |                   |                      |                  |         |                     |       |              |
| Rockport  | 877 4770 1         | 15           | 3/91          | --                | Aransas Bay          | 0.35             | 0.00    | -1.88               | 0.35  | N            |
| Bayside   | 877 4652           | 30           | 2/93          | --                | Copano bay           | 0.40             | 0.00    | --                  | 0.40  | N            |
| Indian Head Point                                   | 877 4527           | 37           | 11/92         | --                | St. Charles Bay      | 0.40             | 0.00    | --                  | 0.40  | N            |
| Goose Island  | 877 4522           | 35           | 6/92          | --                | St. Charles Bay      | TO BE CALCULATED |         |                     |       | N            |
| Copano Bay  | 877 4513 0         | 36           | 11/89         | 5/8/90            | Aransas Bay          | 0.38             | 0.00    | -1.63               | 0.38  | N            |

(Continued)

**Table 5 (Concluded)**

| Station Name   | NOS Station Number | TCOON Number | Installed | Removed | Water Body        | mhw ft*       | mlw ft*          | Observed Lowest ft* | Mn ft | NGVD '29 Tie |
|--|--------------------|--------------|-----------|---------|-------------------|---------------|------------------|---------------------|-------|--------------|
| <b>F. NOS Chart Numbers 11316 and 11317</b>                |                    |              |           |         |                   |               |                  |                     |       |              |
| North Matagorda  | 877 3963 1         | 23           | 9/91      | --      | Espiritu Bay      | 0.81          | TO BE CALCULATED |                     |       | N            |
| Port O'Conner  | 877 3701 0         | 57           | 4/91      | 4/92    | Matagorda Bay     | 0.07          | 0.07             | -0.84               | 0.74  | N            |
| Rawlings   | 877 3304           | 54           | 6/93      | --      | Colorado River    | --            | --               | --                  | --    | N            |
| Port Lavaca  | 877 3259 1         | 33           | 9/92      | --      | Lavaca Bay        | 0.98          | 0.10             | -0.79               | 0.88  | N            |
| Palacios   | 877 3156 1         | 34           | 9/92      | 4/95    | Matagorda Bay     | 1.00          | 0.00             | --                  | 1.00  | N            |
| <b>G. NOS Chart Numbers 11319, 11321, and 11322</b>        |                    |              |           |         |                   |               |                  |                     |       |              |
| East Matagorda   | 877 3001           | 32           | 3/92      | --      | E. Matagorda Bay  | 0.40          | 0.00             | --                  | 0.40  | N            |
| Rivers End   | 877 2689           | 49           | 11/92     | --      | San Bernard River | 0.90          | 0.10             | --                  | 0.80  | N            |
| Church Hill Bridge   | 877 2537           | 50           | 11/92     | --      | San Bernard River | 1.10          | 0.10             | --                  | 1.00  | N            |
| Freeport Entrance Jetty                                    | 877 2479 0         | --           | 10/77     | 1/80    | Gulf of Mexico    | 1.64          | 0.38             | -1.00               | 1.26  | Y            |
| Freeport   | 877 2440 1         | 56           | 3/95      | --      | Dow Barge Canal   | 1.69          | 0.36             | -3.60               | 1.33  | Y            |
| Christmas Bay  | 877 2132 1         | 501          | 10/90     | --      | Christmas Bay     | 0.80          | 0.10             | --                  | 0.70  | N            |
| Bastrop Bay  | 877 1984           | 520          | 6/95      | --      | W. Galveston Bay  | NOT AVAILABLE | NOT AVAILABLE    | --                  | --    | N            |
| <b>H. NOS Chart Numbers 11323, 11326, 11327, and 11328</b> |                    |              |           |         |                   |               |                  |                     |       |              |
| Galveston Pleasure Pier                                    | 877 1510 1         | 21           | 3/91      | --      | Gulf of Mexico    | 1.90          | 0.50             | -4.09               | 1.40  | Y            |
| Galveston Pier 21  | 877 1450 1         | 22           | 4/91      | --      | Galveston Chnl    | 1.32          | 0.35             | -5.60               | 0.97  | Y            |
| Galveston Bay Entrance                                     | 8771416 1          | 522          | 11/95     | --      | Galveston Bay     | NOT AVAILABLE | NOT AVAILABLE    | --                  | --    | N            |
| Port Bolivar   | 877 1328 1         | 521          | 6/94      | --      | Galveston Bay     | 1.30          | 0.20             | --                  | 1.10  | N            |
| Eagle Point  | 877 1013 1         | 507          | 4/93      | --      | Galveston Bay     | 1.10          | 0.10             | --                  | 1.00  | N            |
| Rollover   | 877 0971           | 518          | 6/94      | --      | East Bay          | 1.36          | 0.40             | --                  | 0.96  | N            |
| Clear Lake   | 877 0933 1         | 502          | 10/90     | --      | Galveston Bay     | NOT AVAILABLE | NOT AVAILABLE    | --                  | --    | N            |
| Lynchburg Landing  | 877 0733 1         | 517          | 6/95      | --      | San Jacinto River | NOT AVAILABLE | NOT AVAILABLE    | --                  | --    | N            |
| Morgans Point  | 877 0613 1         | 503          | 5/92      | --      | Houston Ship Chnl | 1.19          | 0.15             | -2.21               | 1.04  | N            |
| Round Point  | 877 0559           | 505          | 9/92      | --      | Galveston Bay     | NOT AVAILABLE | NOT AVAILABLE    | --                  | --    | N            |
| <b>I. NOS Chart Numbers 11332 and 11342</b>                |                    |              |           |         |                   |               |                  |                     |       |              |
| High Island  | 877 0923           | 509          | 4/94      | --      | Gulf of Mexico    | 2.10          | 0.50             | --                  | 1.60  | N            |
| Sabine Pass  | 877 0570 1         | 16           | 3/90      | --      | Gulf of Mexico    | 1.20          | 0.30             | --                  | 0.90  | N            |
| Mesquite Point   | 877 0539           | 506          | 5/93      | --      | Sabine Lake       | NOT AVAILABLE | NOT AVAILABLE    | --                  | --    | N            |
| Port Arthur  | 877 1238 1         | 524          | --        | --      |                   |               |                  |                     |       |              |

\*Note: mhw, mlw, and Lowest/Observed are referenced to local mlw = 0.0 ft.



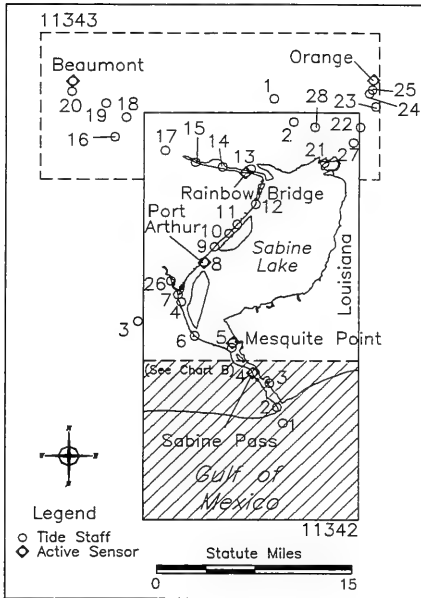


Figure 13. Chart A (Includes NOAA Charts 11342 and 11343)

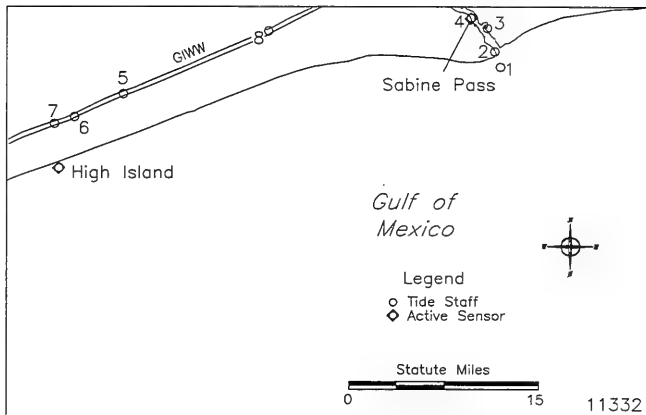


Figure 14. Chart B (Includes NOAA Chart 11332)

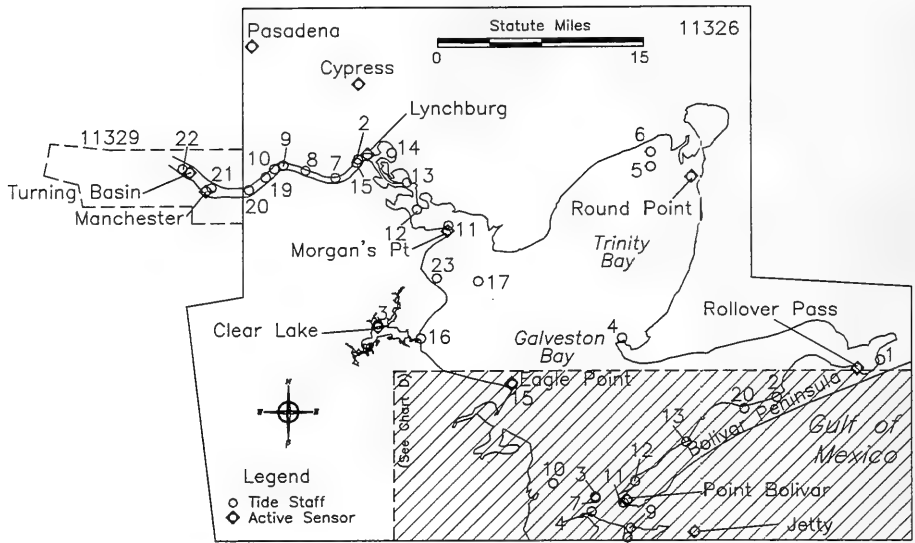


Figure 15. Chart C (Includes NOAA Chart 11326 and 11329)

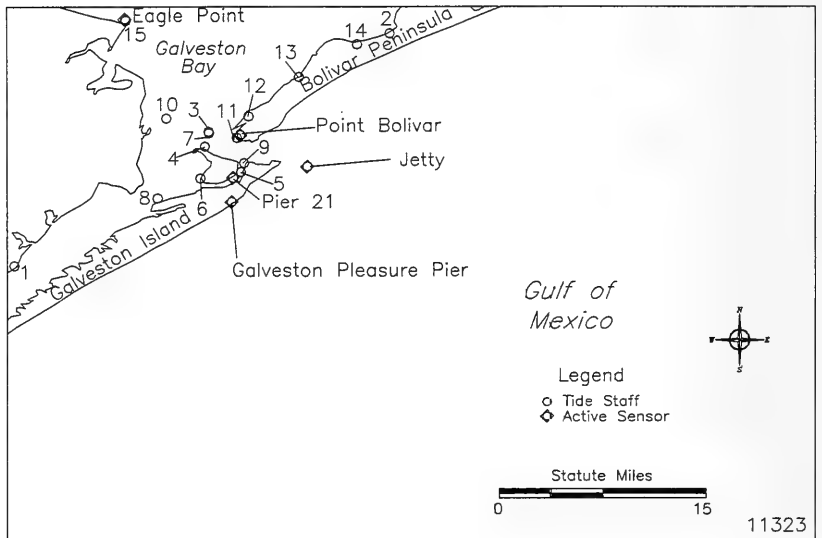


Figure 16. Chart D (Includes NOAA Chart 11323)

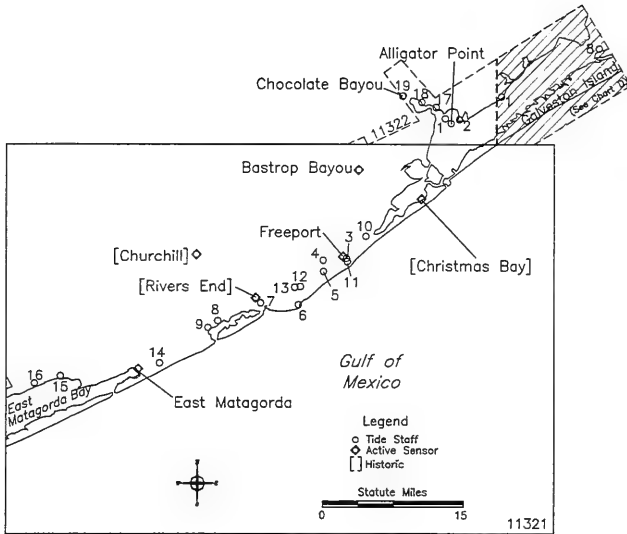


Figure 17. Chart E (Includes NOAA Charts 11321 and 11322)

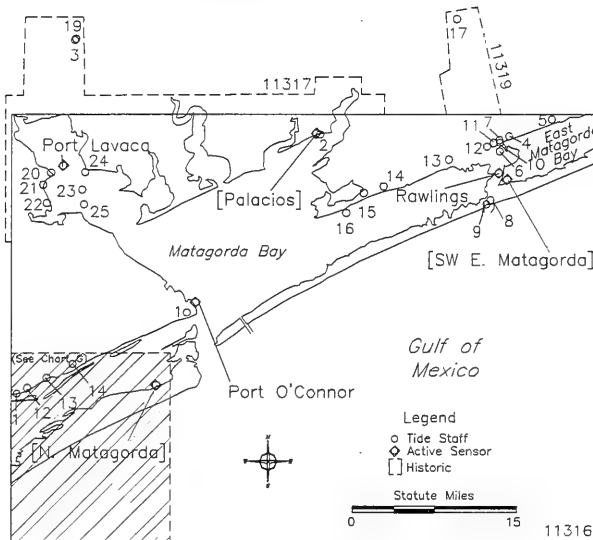


Figure 18. Chart F (Includes NOAA Charts 11316, 11317, and 11319)

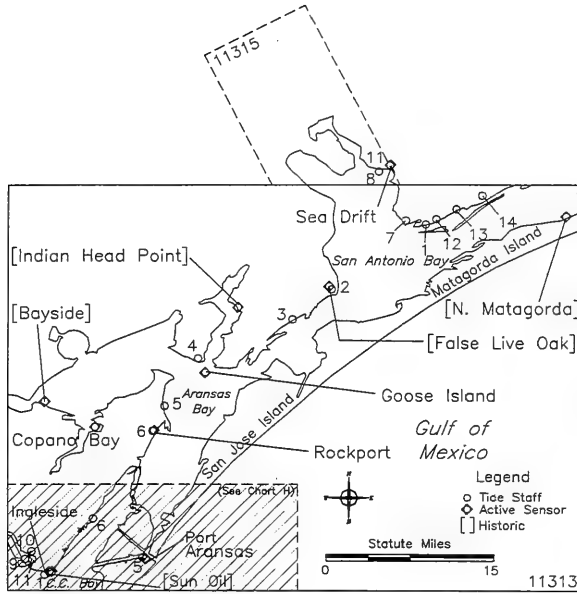


Figure 19. Chart G (Includes NOAA Charts 11313 and 11315)

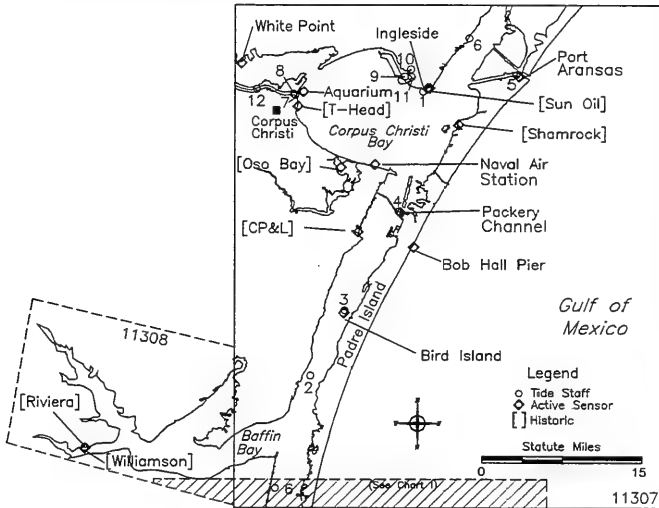


Figure 20. Chart H (Includes NOAA Charts 11307 and 11308)

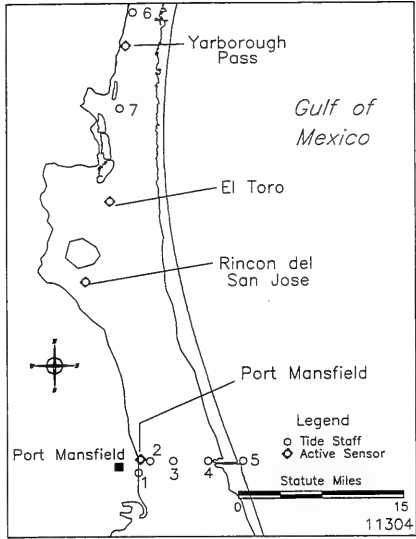


Figure 21. Chart I (Includes NOAA Chart 11304)

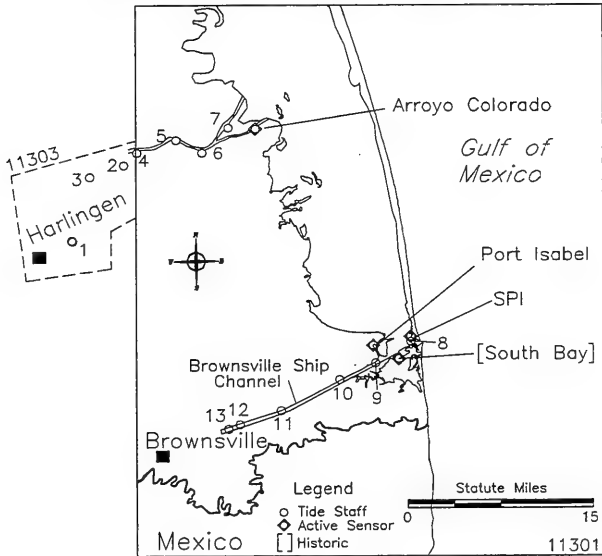


Figure 22. Chart J (Includes NOAA Charts 11301 and 11303)

## Example of Need for Gauges

The inland bays and estuaries along the Texas coast are connected to the Gulf of Mexico through narrow and, in some cases, shallow openings in the barrier islands. As the tidal movement from the Gulf progresses through these openings, it is diminished by the restrictions and by friction. The astronomical force becomes weak compared to the strong meteorological forces and is frequently masked and impossible to consistently identify. The masking makes the computation of a tidal datum difficult or impossible in the traditional manner. Kraus and Militello (1996) document wind setup and setdown of water level on the eastern and western ends of East Matagorda Bay, Texas, and found a difference of 2 ft in water level at opposite ends of the bay produced by a winter northern front, with 1-ft differences occurring almost weekly in winter. The tidal range in East Matagorda Bay is only 0.4 ft.

Much of the area within the navigational waterways is nontidal, which has been observed from historic data and existing TCOON stations (Gill, Hubbard, and Dingle 1995). Where tidal datums cannot be determined, stations will need to be spaced to determine and record variability in elevations within each area. An example of such variability is shown in Figure 11, which is a plot of simultaneous records from three stations in the Land Cut in the Laguna Madre. The stations, going from north to south, are Yarborough (004), EL Toro (007), and Rincon de San Jose (003), which are located approximately 15 miles apart.

The horizontal axis plots time and covers a 2-day period. The vertical axis represents the height of the water in feet. The three records are plotted on the individual station datums or zeros, which are arbitrary and have no direct height relationship between stations. The purpose of the graph is to demonstrate how the water level changes between stations within close proximity. The water level can be rising in one area, but falling in another area just a few miles away. The downward pointing spikes in the records are probably associated with the drawdown accompanying the passage of barges. By associated pairs of spikes with the passage of the same barge tow at El Toro and Rincon, the speed of the barges can be estimated.

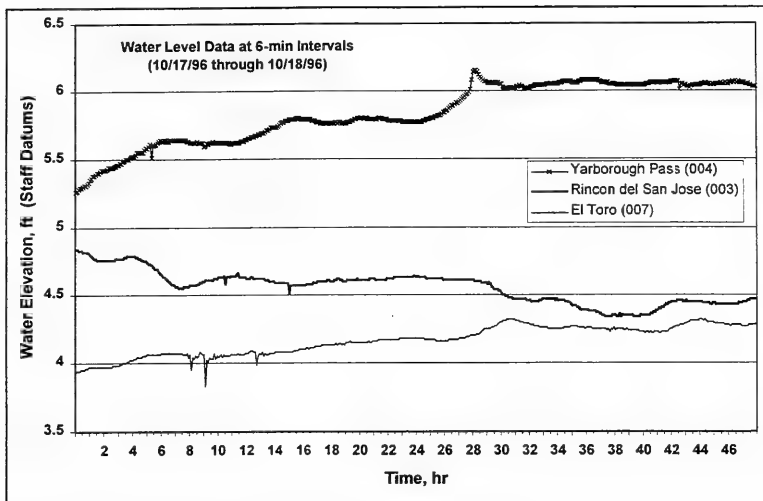


Figure 23. Plot of simultaneous water-level records at three neighboring nontidal stations along the GIWW

## Establishment of Stations

Because of the variability in water-level change within short distances along the shallow inland waters of Texas, numerous temporary gauges will be needed for establishing requirements for long-term stations. The next step in designing a network should be a detailed field reconnaissance to determine suitable locations for short-term stations. Such a reconnaissance may take on the order of a month and involve CESWG Area Office personnel, as well as coordination with personnel overseeing dredging operations and regulatory functions.

Short-term stations should be operated for a minimum of 30 days to provide data for zoning the area. The requirement for the number and location of long-term stations for navigation and regulatory support can then be made.

To meet its specific needs during particular dredging operations, the CESWG has in the past made water-level measurements and will continue to do so. It is desirable that these project-level gauges be referenced to benchmarks, and they must be referenced to the applicable NOS chart

datum. The sensors and associated equipment used to make the measurements should meet the accuracy requirements of the USACE for its dredging mission and conform as much as possible to the needs of other agencies. There may well be several methods of acquiring reliable data. We should always be cognizant of new developments in this field. However, before introducing these procedures into the TCOON, reliability and acceptability should be verified.



# 6 Conclusions and Recommendations

---

A needs assessment was conducted to determine the requirements of the CESWG, for water-level and associated information along the coast of Texas, focusing on the inland coastal waters. The CESWG will use this information in maintaining Federal navigable waterways, coastal engineering, and environmental regulation in Texas. The assessment included evaluation of the existing Federal and state infrastructures for making water-level and wind measurements along the Texas coast, relevant regulations and practices of the USACE and NOS, typical projects and uses of water-level data by CESWG, and several anticipated future needs of CESWG.

Main requirements of CESWG for water-level information and recommendations are given below. The material is organized according to individual subjects with the requirements and recommendations developed from the information and findings described in the main text and appendices of this report.

## **Federal and State Cooperation (Backbone Network)**

An excellent network of water-level and wind measurement stations exists along the Texas coast that has been primarily supported by the TGLO and the TWDB. It is recommended that the CESWG join these state agencies and other users of the TCOON in supporting and improving the network, and in prioritizing its activities according to common needs. A TCOON Steering Committee, formed of representatives from Federal and state agencies contributing financial support for the network, now

meets periodically throughout the year to review performance and quality of products, set priorities, apportion funds, and plan future work. In formulation of a backbone network with shared resources, priority in allocation of resources is decided by the Steering Committee members to minimize imbalances in benefits.

The backbone network is a collection of stations and capabilities that meets the common needs of all member agencies of the TCOON Steering Committee. Table 6, located at the end of this chapter, gives guidance on those water-level stations recommended for support of CESWG requirements as part of the backbone network. Existing and recommended future stations are listed in the table. Table 6 integrates much of the work conducted in this study.

## **Real-Time Voice Reporting**

Up to 1996, the TCOON had existed primarily to provide information for three purposes. These are: (a) dealing with boundary issues between the state and private-property owners, (b) operating the state's numerical simulation models of water circulation and water quality, and (c) operating the state's soil-spill fate numerical simulation model (presently obtaining wind data in near-real time via the internet). Reporting of water level is of highest priority, followed by provision of wind speed and direction reporting at selected stations.

Past state-related functions of the TCOON have rarely required real-time data voice reporting. However, real-time voice reporting is considered an essential part of a backbone network designed to meet operational needs of CESWG. Real-time reporting will benefit agencies involved with oil-spill prevention and response, as well as Federal, state, and local agencies faced with decisions on hurricane-response evacuation. Other beneficiaries of real-time voice reporting would be the U.S. Coast Guard, waterways transportation industries of various kinds (such as ports and barge operators), environmental interests, and academic research and education programs. A portion of the backbone network funding should, therefore, be identified for staged introduction of real-time reporting according to priorities set by the TCOON Steering Committee.

Voice reporting should satisfy at least five requirements. Information should be: (a) available in near-real time (for example, refresh rate of 15 min); (b) given in engineering units (presently, feet); (c) referenced to chart datum; (d) easily repeated by telephonic or radio command, without having to redial; and (e) obtainable the day after original interrogation for verification and archival in project files.

Voice reporting may be by telephone (land line or cellular) or by radio. However, provision should be made to allow priority access by the TCOON Steering Committee agencies, as distinguished from possible access by other agencies and the general public.

## **Training of Galveston District Personnel**

A training program and materials should be developed for CESWG Area Office and other personnel who will require the real-time and archived data. The training would include such topics as review of tidal datums and relations to District project low-water datums (see next section), review of previous datums used by CESWG and their relation to present-day datums, elements of the forces producing water-level change, properties of water-level change along the coast, practical aspects of communication with the gauges, and use of the WWW with associated data downloading and printing of graphs and tables. Without orientation and special training of its personnel, the CESWG will not obtain maximum benefit from participation in the TCOON.

## **Project Low-Water Datums**

Much of the inland coastal waters of Texas, which are traversed by several hundred miles of maintained navigable channels, experiences water-level variations that are not well quantified by traditional NOS methods of datum determination. Seasonal changes in water level as well as wind setup and setdown can obscure or dominate tidal induced water-level signals. As a result, water level drops considerably below chart datum (mllw, mlw, or msl, depending on the chart) for considerable time (order of several days).

Therefore, for assuring safe navigation, we recommend that the CESWG develop project low-water datums based on water-level observations. The project low-water datums, specific to certain locales depending on the known properties of the water level variation, would be referenced to an existing NOS chart datum, if available. A specialized effort needs to be implemented to develop rational and defensible project low-water datums. That is, project low-water datums should be based on observation and sound procedures, and the determined values should not be unreasonably conservative, thereby causing unnecessary dredging.

## **Engineering Utility of Archived Data**

The existing WWW internet site (<http://dco.cbi.tamucc.edu/data>) for accessing TCOON data is a sound basic system. Data loaded to the site may be as recent as 3 hr old. Lists of data and plots can be generated by command for arbitrary time intervals, and the queried information can be downloaded.

Presently, the data are reported to the (arbitrary) local staff zero, called the “datum of tabulation.” The datum of tabulation remains constant through the life of a station (even if the physical gauge is removed, later to be replaced) and is one of the key procedures in the process of relating water level to fixed benchmarks on land. However, the datum of tabulation is arbitrary and not, of itself, physically meaningful. Two enhancements to the WWW site need to be made for applications of the data by the CESWG and its contractors. These enhancements will also be valuable for any engineering or scientific study or project.

First, the WWW site should provide the relation between staff zero and the mllw datum (or msl if mllw cannot be defined, as in nontidal waters) and an option given to plot the data to mllw or msl. This capability can be added with little effort. Second, all tidal datums available for the individual stations should be accessible. Other datums, such as mhw and msl, enter in regulatory functions and environmental modeling conducted by the CESWG and its contractors. Extreme high- and low-water levels contained in the record, as well as the tidal range, should be given. As much as possible, and in coordination with NOS, the tidal datums should be computed to the most recent 19-year interval if the NTDE is not

updated to modern time. This second capability will require some effort, but could be accomplished within a calendar year.

## **Project-Specific Operational Gauges**

The backbone network, described in Recommendation 1 and in Table 6, is the system of long-term gauges and selected short-term gauges that serve as primary references and furnish continuous records. The backbone network serves the common need of all TCOON Steering Committee member agencies.

The CESWG has its own specific needs for short-term water-level measurement and reporting at the project level. Such a project might have duration on the order of 1 to 6 months. Voice-reporting project-specific gauges would greatly reduce cost and improve reliability in performing reconnaissance surveys, project-condition surveys, contract-payment surveys, and surveys made during the course of dredging in navigable channels and waterways. The minimum number of operational gauges necessary can be determined through the process of reconnaissance and tidal zoning as described in this report. Typically, one to three short-term project gauges might be necessary if gauges from the backbone network augment their capability.

As part of a long-term plan, permanent or semi-permanent platforms or mounting areas must be constructed and maintained. The platforms should be designed such that a permanent vertical elevation can be identified, allowing the water level measured at the project-specific gauges to be tied to the NOS datum applicable to those waters.

Project-specific water-level gauges need not be to the same high accuracy as backbone gauges that have the function of making measurements to determine traditional tidal datums. Backbone gauges employ equipment and procedures to assure overall accuracy on the order of a few millimeters. The function of project-specific gauges is to control soundings taken in maintenance of navigation channels. In project-related hydrographic surveys made in water depths of 10 to 25 ft, for example, sounding equipment and procedures are expected to have total-system accuracy of  $\pm 0.2$  to  $\pm 0.5$  ft (USACE 1991), depending on sea state and

texture of the bottom sediments, among other variables. Therefore, it is appropriate to require project-specific water-level gauges to be accurate to  $\pm 0.1$  to  $\pm 0.2$  ft, depending on environmental conditions at the site and distance to the nearest backbone gauge. Such accuracy may be economically achievable with DGPS technology, but this technology must be tested.

In addition to documented and verifiable surveying procedures, calibration records on the water-level instruments or sensors should be kept. It is recommended that, for Texas inland coastal waters, self-contained pressure gauges with radio transmission capability be investigated for fulfilling requirements of project-specific operational water-level gauges.

Data stored in or transmitted from the project gauges should be compatible with TCOON standards, for example, as an average taken over a 6-min interval. The data should be incorporated in the TCOON database, together with the associated local reference elevation of the platform and other essential information that will allow re-establishment of the “project station” and access by interested parties. If measurements made to meet project-level requirements have greater tolerances or reliability than backbone gauges, the accuracy range of the values in the database should be provided as part of the information given with the raw or processed data.

## **Outside (Gulf-side) Gauges and Wave Measurement**

The capabilities of dredging and navigating in a channel or waterway depend on sea state (surface wave height, period, and direction), as well as on absolute water depth. Measurement of sea state is particularly pertinent in entrance channels and in the offshore of deep-draft channels. Individual surface waves (typical periods of 5 to 10 sec) as well as longer period swell (typical period of 30 to 60 sec) can disrupt or halt dredging operations and make navigation unsafe. Real-time voice reporting and documentation of sea state could be incorporated into dredging operations to make them more efficient, as well as make navigation safer.

Wave height and period can be measured with pressure gauges. Such gauges can also report water-level variations. Vertical and horizontal position of the gauges may be determined for support of dredging operations with sufficient accuracy through DGPS survey.

## **Investigation of DGPS**

Many of the inland coastal waters of Texas are nontidal according to traditional NOS determinations. Therefore, a reference for navigational purposes other than mllw must be used. Because interconnection of the stations through conventional differential levels is not feasible, surveying by vertical as well as horizontal DGPS procedures should be considered, with due regard to verification of stated accuracy.

**Table 6  
Recommended Long-Term Water-Level Stations (Backbone Network) and  
Required Short-Term Stations to Fill in Gaps for Support of USACE  
Operations**

| Station Name  | NOS Station No.<br>877- | Comments  |
|---|-------------------------|---|
| <b>NOS Chart Numbers 11332, 11342<br/>Sabine Pass, Sabine Lake, Port Arthur</b>                                 |                         |   |
| Sabine Pass   | 0570 1                  | NOS long-term station   |
| Mesquite Point  | 0539                    | Uncertain if this station is necessary – needs detailed evaluation  |
| High Island   | 0923                    | Low waters being cut off; gauge must be moved   |
| Port Arthur   | 1238 1                  |   |
| <b>NOS Chart Numbers 11323, 11326, 11327, 11328<br/>Galveston Entrance, Galveston Bay, Houston Ship Channel</b> |                         |   |
| Rollover  | 0971                    |   |
| Galveston Pleasure Pier   | 1510 1                  | NOS long-term, open-Gulf station  |
| Galveston Pier 21   | 1450 1                  | NOS long-term station   |
| Galveston Bay Entrance  | 1416 1                  |   |
| Point Bolivar   | 1328 1                  |   |
| Eagle Point   | 1013 1                  |   |
| Clear Lake  | 0933 1                  | Uncertain if this station is necessary – needs detailed evaluation  |
| Lynchburg Landing   | 0733 1                  |   |
| Morgan's Point  | 0613 1                  |   |
| Round Point   | 0559                    |   |
| <b>NOS Chart Numbers 11316, 11319, 11321, 11322<br/>Freeport, East Matagorda Bay, Colorado River</b>            |                         |   |
| Freeport  | 2440 1                  | NOS long-term station   |
| East Matagorda  | 3001 1                  |   |
| Colorado River Locks  |                         | Recommended placing long-term gauge at confluence of GIWW and Colorado River  |
| <b>NOS Chart Numbers 11316, 11317<br/>Colorado River Navigation Channel, Matagorda Bay, Espiritu Santo Bay</b>  |                         |   |
| Rawlings  | 3304                    | Overlap record with a new Colorado R. Navigation Channel Entrance Station, then remove  |
| Mouth of Colorado River Navigation Channel  |                         | If maintenance of the CR Navigation Channel will continue, then recommend installation of open-Gulf station on the north jetty and removal of Rawlings  |
| Entrance of GIWW land cut to Matagorda Bay  |                         | Establish short-term station to determine tidal characteristics in central portion of bay and compare to Port O'Conner and Port Lavaca stations   |
| Matagorda Ship Channel short- or long-term station  |                         | Establish station on bay side of the ship channel and compare to Port O'Conner to determine differences; if similar characteristics, remove Matagorda Ship Channel gauge and retain Port O'Conner gauge |
| Port Lavaca   | 3259 1                  |   |
| Port O'Conner   | 3701 0                  |   |
| Espiritu Santo Bay short-term station   |                         | Establish short-term station to determine tidal characteristics between Port O'Conner and San Antonio Bay   |
| Victoria Barge Canal long-term station  |                         | Establish station reporting water level and wind  |

(Continued)



| <b>Table 6 (Concluded)</b>   |                             |   |
|--|-----------------------------|---|
| <b>Station Name</b>  | <b>NOS Station No. 877-</b> | <b>Comments</b>   |
| <b>NOS Chart Numbers 11313, 11314<br/>San Antonio Bay, Aransas Bay</b>                                       |                             |   |
| San Antonio Bay – Short-term or long-term station  |                             | Establish station in San Antonio and determine whether it should be long-term based on tidal characteristics and dredging operation needs   |
| Copano Bay   | 4513 0                      |   |
| Rockport   | 4770 1                      | NOS long-term station   |
| <b>NOS Chart Numbers 11308, 11309<br/>Corpus Christi Bay, Corpus Christi Ship Channel</b>                    |                             |   |
| Port Aransas   | 5237 1                      | Adjacent to Corpus Christi Ship Channel   |
| Port Ingleside   | 5283 1                      | Not strictly necessary, but has solid infrastructure; also, is near intersection of GIWW and CC Ship Channel  |
| Texas State Aquarium   | 5296 1                      | Near the Corpus Christi harbor entrance   |
| CC Naval Air Station   | 5421 1                      | Test station for TCOON  |
| Packery Channel  | 5792 1                      |   |
| <b>NOS Chart Number 11307<br/>Corpus Christi Bay, Upper Laguna Madre, Baffin Bay</b>                         |                             |   |
| Corpus Christi, Bob Hall Pier  | 5870 1                      | NOS long-term open-Gulf station   |
| South Bird Island  | 6139 1                      | Marginally tidal  |
| Short-term stations  |                             | Establish two or three short-term stations between South Bird Island (marginally tidal) and Yarborough Pass (Baffin Bay) (nontidal) to determine tidal characteristics along the GIWW |
| <b>NOS Chart Numbers 11304, 11306, 11308<br/>GIWW Land Cut, Port Mansfield</b>                               |                             |   |
| Yarborough Pass  | 6687 1                      | Nontidal  |
| El Toro  | 7562 1                      | Nontidal  |
| Rincon del San Jose  | 7812 1                      | Nontidal  |
| Short-term stations  |                             | Establish one or two short-term stations between Rincon and Port Mansfield stations to determine tidal characteristics between the two locations                                      |
| Port Mansfield   | 8490 1                      | NOS long-term station; nontidal   |
| <b>NOS Chart Number 11301<br/>Arroyo Colorado, Lower Laguna Madre, Brownsville Ship Channel, Port Isabel</b> |                             |   |
| Arroyo Colorado  | 9038                        | Nontidal  |
| Short-term stations  |                             | Establish two or three short-term stations between Arroyo Colorado (nontidal) and the Port Isabel & SPI-CG (tidal) stations to determine tidal characteristics along the GIWW         |
| Port Isabel  | 9770 1                      | Long-term NOS gauge   |
| South Padre Island, Coast Guard Station  | 9748 1                      | Near Brazos Santiago Ship Channel and jetties   |
| Long-term open Gulf station  |                             | If Cameron County rebuilds a fishing pier at South Padre Island, re-establish a long-term Gulf station for dredging operations at Brazos Santiago Entrance Channel                    |

# References

---

- Gill, S. K., Hubbard, J. R., and Dingle, G. (1995). "Tidal characteristics and datums of the Laguna Madre, Texas," NOAA Technical Memorandum NOS OES 008, National Oceanic and Atmospheric Administration, National Ocean Service, Silver Spring, MD.
- Harris, D. L. (1981). "Tides and tidal datums in the United States," Special Report 7, U.S. Army Engineer Waterways Experiment Station, Coastal and Hydraulics Laboratory, U.S. Government Printing Office, Washington, DC.
- Hicks, S. D. (1980). "The National Tidal Datum Convention of 1980," NOAA S/T 80-177, National Oceanic and Atmospheric Administration, National Ocean Service, Silver Spring, MD.
- \_\_\_\_\_. (1985). "Tidal datums and their uses – a summary," *Shore & Beach*, January, 27-32.
- \_\_\_\_\_. (1986). "Tidal datums and their uses – a summary," *The Hydrographic Journal* 39, 17-20.
- \_\_\_\_\_. (1989). "Tide and current glossary," National Ocean Service, National Oceanic and Atmospheric Administration, Rockville, MD.
- Hydrographic Manual*. 1976. (4<sup>th</sup> ed.). National Oceanic and Atmospheric Administration, National Ocean Service, Rockville, MD.
- Kraus, N. C. and Militello, A. (1996). "Hydraulic feasibility of proposed southwest corner cut, East Matagorda Bay, Texas," Technical Report TAMU-CC-CBI-96-03, Conrad Blucher Institute for Surveying and Science, Texas A&M University-Corpus Christi.
- Lyles, S. D., Hickman, L. E., Jr., and Debaugh, H. A., Jr. (1988). "Sea level variations for the United States 1855 – 1986," National Oceanic and Atmospheric Administration, National Ocean Service, Rockville, MD.

- Michaud, P. R., Thurlow, C. I., and Jeffress, G. A. (1995). "Collection and dissemination of marine information from the Texas Coastal Ocean Observation network. *Proceedings, U.S. Hydrographic Conference*. Hydrographic Society Special Publication No. 32, 168-173.
- National Oceanic and Atmospheric Administration. (1977). "Establishment of gulf coast low water datum," Federal Register 42 (179), 46381-46382.
- \_\_\_\_\_. (1990). "Index of tide stations, United States of America and miscellaneous other locations," Ocean and Lake Levels Division, National Ocean Service, Rockville, MD.
- National Research Council. (1987). *Responding to changes in sea level: Engineering implications*. Marine Board, National Academy of Science, Washington, DC.
- Shalowitz, A. L. (1964). *Shore and sea boundaries*. Publication 10-1 (2 Vol), U.S. Coast and Geodetic Survey, U.S. Government Printing Office, Washington, DC.
- Shore protection manual*. (1984). (4<sup>th</sup> ed., 2 Vol), U.S. Army Engineer Waterways Experiment Station, U.S. Government Printing Office, Washington, DC.
- Swanson, R. L., and Thurlow, C. I. (1973). "Recent subsidence rates along the Texas and Louisiana coasts as determined from tide measurements," *Journal of Geophysical Research* 78(15), 2665-2671.
- U.S. Army Corps of Engineers. (1989). "Water levels and wave heights for coastal engineering design," Engineer Manual 1110-2-1414, Washington, DC.
- \_\_\_\_\_. (1991). "Hydrographic surveying." Engineer Manual 1110-2-1003, Washington, DC.
- \_\_\_\_\_. (1993). "Requirements and procedures for referencing coastal navigation projects to mean lower low water datum," Engineer Technical Letter 1110-2-349, Washington, DC.
- \_\_\_\_\_. (1994). "Conversion to the North American Vertical Datum of 1988," Engineer Technical Letter 1110-1-152, Washington, DC.



# **Appendix A**

## **Locations and Capabilities of TCOON Stations, September 1996**

---

**Table A1  
TCOON and NOS Water-Level Stations**

| Station Name      | TCOON Station | NOS Station | Lat. / Long.      | Start of Record | End of Record | Other Sensors             | Backup |
|-------------------|---------------|-------------|-------------------|-----------------|---------------|---------------------------|--------|
| Alligator Point   | 508           | 87718011    | 29 10.0' 95 07.5' | Oct 92          | --            |                           |        |
| Aquarium          | 8             | CB190008    | 27 40.8' 97 23.5' | Apr 90          | --            | Wind, BP., Air/Water Temp |        |
| Arroyo Colorado   | 47            | 877190381   | 26 21.2' 97 19.5' | Nov 92          | --            | Wind                      |        |
| Bastrop Bayou     | 520           | 87719841    | 29 05.4' 95 16.9' | Jun 95          | --            |                           |        |
| Bayside           | 30            | 87746521    | 28 04.0' 97 12.2' | Feb 93          | Dec 95        |                           |        |
| Beaumont          | 514           | 87705951    | 30 05.7' 94 05.4' | Sep 94          | --            |                           |        |
| Bird Island Basin | 13            | 87761391    | 27 29.1' 97 19.1' | Sep 91          | --            | Wind, Water Temp          | Y      |
| Bob Hall          | 14            | 87758701    | 27 34.9' 97 13.0' |                 | --            |                           |        |
| Byarea Park       | 510           | 87708111    | Not Available     | None            | --            |                           |        |
| Chocolate Bayou   | 519           | 87717081    | 29 12.7' 95 12.4' | None            | --            |                           |        |
| Christmas Bay     | 501           | 87721321    | 29 02.5' 95 10.5' | Oct 90          | Aug 95        |                           |        |
| Churchill         | 50            | 87725371    | 28 57.0' 95 33.3' | Nov 92          | Jul 94        |                           |        |
| Clear Lake        | 502           | 87709331    | 29 33.8' 95 04.0' | Jun 94          | --            |                           |        |
| Colorado River    | 48            |             | Not Available     | Nov 92          | Nov 92        |                           |        |
| Copano            | 36            | 87745131    | 28 46.5' 97 31.9' | Jun 92          | --            |                           |        |
| CP&L B. Davis     | 20            | 87756331    | 27 36.2' 97 18.0' | May 90          | Nov 91        |                           |        |
| Cypress           | 516           | 87706531    | 29 50.8' 95 05.3' | None            | --            |                           |        |
| Delta Rincon      | 29            | 87752751    | Not Available     | Nov 91          | Jul 93        |                           |        |
| Eagle Point       | 507           | 87710131    | 29 29.9' 94 54.7' | Apr 93          | --            |                           |        |
| East Malagorda    | 32            | 87730011    | 28 45.7' 95 39.2' | Mar 92          | --            | Wind                      |        |
| El Toro           | 7             | 87752371    | 26 56.5' 97 27.4' | Mar 90          | --            | Wind                      | Y      |
| False Live Oak    | 38            | 87742301    | 28 13.9' 96 47.9' | Jun 92          | Apr 94        |                           |        |
| Freeport          | 56            | 87724401    | 28 56.8' 95 18.5' |                 | --            | Wind                      | Y      |
| Galv. Pl. Pler    | 21            | 87715101    | 29 17.1' 94 47.3' | Dec 91          | --            |                           |        |
| Galv. Offshore    | 525           | 87719041    | 29 08.0' 94 28.0' | None            | --            |                           |        |
| Goose Island      | 35            | 87745221    | 28 20.0' 96 27.1' | Jun 92          | --            | Wind                      |        |

(Sheet 1 of 3)

**Table A1 (Continued)**

| Station Name    | TCCOON Station | NOS Station | Lat./Long         | Start of Record | End of Record | Other Sensors    | Backup |
|-----------------|----------------|-------------|-------------------|-----------------|---------------|------------------|--------|
| High Island     | 509            | 87709321    | 29 32.3' 94 23.1' | Apr 94          | --            |                  |        |
| Indian Head Pt. | 37             | 87745271    | 28 12.1' 96 55.7' | Nov 92          | Feb 95        |                  |        |
| Ingliside Jetty | 6              | 87752831    | 27 49.3' 97 12.2' | Jan 89          | --            | Wind             |        |
| Lynchburg       | 522            | 87714161    | 29 19.6' 94 42.5' | Nov 95          | --            |                  |        |
| Manchester      | 517            | 87707331    | 29 45.9' 95 04.7' | Jun 95          | --            |                  |        |
| Mesquite Point  | 513            | 87707771    | 29 43.4' 95 15.9' | None            | --            |                  |        |
| Morgan's Point  | 506            | 87705391    | 29 46.0' 93 53.7' | May 93          | --            |                  |        |
| NASCC           | 503            | 87806131    | 29 40.6' 94 59.1' | May 92          | --            |                  |        |
| North Matagorda | 1              | 87754211    | 27 42.3' 97 16.8' | May 89          | --            | Wind             |        |
| Orange          | 23             | 87739631    | 28 20.0' 96 27.7' | Feb 91          | Jan 96        | Wind             |        |
| Packery Chnl.   | 515            | 87705971    | 30 05.8' 93 43.4' | Aug 94          | --            |                  |        |
| Palacios        | 5              | 87757921    | 27 38.0' 97 14.2' | Nov 88          | --            |                  |        |
| Pasadena        | 34             | 87731561    | 28 41.8' 96 13.9' | Apr 92          | Apr 95        |                  |        |
| Pier 21         | 512            | 87707751    | 29 53.5' 95 12.7' | None            | --            |                  |        |
| Point Bolivar   | 22             | 87714501    | 29 18.8' 94 47.2' | Apr 92          | --            |                  |        |
| Port Aransas    | 521            | 87713281    | 29 21.8' 94 46.7' | Jun 94          | --            |                  |        |
| Port Arthur     | 9              | 87752371    | 27 50.4' 97 04.4' | May 90          | --            | Wind             |        |
| Port Bolivar    | 524            | 87704751    | 29 52.0' 93 55.8' | None            | --            |                  |        |
| Port Isabel     | 521            | 87713281    | 29 21.8' 94 46.7' | May 94          | --            |                  | Y      |
| Port Lavaca     | 18             | 87797701    | 26 03.7' 97 12.9' |                 | --            |                  |        |
| Port Mansfield  | 33             | 87732591    | 26 38.4' 96 36.6' | Mar 92          | --            | Wind             |        |
| Port O'Connor   | 47             | 87737011    | 26 21.1' 97 19.5' |                 | --            |                  | Y      |
| Rainbow Bridge  | 504            | 87705201    | 28 27.2' 96 24.3' | Jun 95          | --            |                  |        |
| Rawlings        | 54             | 87733041    | 29 58.6' 93 52.8' | Sep 93          | --            |                  |        |
| Rincon          | 54             | 87733041    | 28 37.7' 95 58.3' | Jun 93          | --            |                  |        |
| Rivers End      | 3              | 87790381    | 26 48.1' 97 28.2' | Mar 90          | --            | Wind, Water Temp | Y      |
|                 | 49             | 87726891    | 28 52.7' 95 27.3' | Nov 92          | Jul 94        |                  |        |

(Sheet 2 of 3)

**Table A1 (Concluded)**

| Station Name    | TCOON Station | NOS Station | Lat./Lang.        | Start of Record | End of Record | Other Sensors      | Backup |
|-----------------|---------------|-------------|-------------------|-----------------|---------------|--------------------|--------|
| Riviera         | 10            | 87766391    | 27 16.5' 97 42.5' | Mar 92          | Feb 95        |                    |        |
| Rockport        | 15            | 87747701    | 28 01.5' 97 02.9' |                 | --            |                    | Y      |
| Rollover Pass   | 518           | 87709711    | 29 30.9' 94 30.8' | Jun 94          | --            |                    |        |
| Round Point     | 505           | 87705591    | 29 44.3' 94 42.4' | Sep 92          | --            |                    |        |
| Sabine Offshore | 523           | 87710811    | 29 29.9' 93 38.4' | None            | --            |                    |        |
| Sabine Pass     | 16            | 87705701    | 29 43.8' 93 52.2' | Aug 90          | --            |                    |        |
| Seadrift        | 31            | 87730371    | 28 24.4' 96 42.7' | Feb 92          | Jul 93        |                    |        |
| Shamrock Island | 39            | 87754221    | 27 45.9' 97 09.0' | Mar 92          | Jan 95        |                    |        |
| SPI/Pl. Nowell  | 51            | 87797481    | 26 04.4' 97 10.0' | Apr 93          | --            | Wind               |        |
| T-Head          | 2             | 87753511    | 27 47.7' 97 23.3' | Feb 90          | Apr 96        | Wind, Air Temp, BP |        |
| Turning Basin   | 511           | 87705551    | 29 44.7' 95 17.0' | None            | --            |                    |        |
| White Point     | 11            | 87751881    | 27 51.6' 97 29.0' | Jul 90          | --            | Wind               |        |
| Yarborough      | 4             | 87766871    | 27 10.0' 97 26.4' | Feb 90          | --            | Wind, Water Temp   | Y      |

(Sheet 3 of 3)



# **Appendix B**

## **Locations of Galveston District Tide Staffs, September 1996**

---

**Table B1**  
**Locations of USACE – Galveston District Tide Staffs**

| Waterway   | Map Key | Location                                  | Lat/Long                         | MLT Ft Below NGVD | Comments  |
|--|---------|---|----------------------------------|-------------------|---|
| <b>Chart A (Includes NOAA Charts 11342 and 11343)</b>  |         |   |                                  |                   |   |
| Cow Bayou  | A1      | Staff on timber bridge                    | 30° 04' 23.15"<br>93° 50' 42.44" |                   | (Small bridge - not used for automobile traffic)      |
| Cow Bayou  | A2      | Bridge City Bridge                        | 30° 02' 38.37"<br>93° 49' 15.96" | N/A               | Staff on timber bulkhead near Moore's Landing         |
| GIWW   | A3      | Near destroyed salt water barrier         | 29° 47' 35.45"<br>94° 00' 36.19" | N/A               | Staff on timber pile along south bank                 |
| Sabine-Neches WW   | A4      | Staff on red day marker 48                | 29° 49' 2.2"<br>93° 57' 27.7"    | N/A               | Staff west of Bethlehem Ship Yard just south of GIWW  |
| Pt. Arthur Ship Channel  | A5      | Hwy 82 bridge                             | 29° 45' 38.5"<br>93° 53' 47.1"   | N/A               | Staff on red day marker 40 near causeway bait shop    |
| Pt. Arthur Ship Channel  | A6      | Keith Lake bridge                         | 29° 46' 31.0"<br>93° 56' 28.6"   | N/A               | Staff on green day marker 43                          |
| Pt. Arthur Ship Channel  | A7      | GIWW / Pt. Arthur Channel                 | 29° 49' 34.5"<br>93° 57' 42.2"   | N/A               | Staff near West Port Arthur Bridge on range marker    |
| Sabine-Neches WW   | A8      | COE Office at U.S. Coast Guard dock       | 29° 52' 1.8"<br>93° 55' 48.6"    | N/A               | Staff on bulkhead                                     |
| Sabine-Neches WW   | A9      | North bank at pump station                | 29° 53' 10.61"<br>93° 55' 3.20"  | N/A               | Staff on pile   |
| Sabine-Neches WW   | A10     | North bank at pump station                | 29° 54' 11.28"<br>93° 54' 0.63"  | N/A               | Staff on pile   |
| Sabine-Neches WW   | A11     | North bank at pump station                | 29° 54' 52.88"<br>93° 53' 23.87" | N/A               | Staff on pile   |
| Sabine-Neches WW   | A12     | At Sabine Towing dock                     | 29° 56' 25.23"<br>93° 52' 2.84"  | N/A               | Staff on timber bulkhead at north bank                |
| Neches River   | A13     | Under Veterans Memorial Bridge            | 29° 59' 4.48"<br>93° 52' 23.62"  | N/A               | Staff on caisson at north bank of river               |
| Neches River   | A14     | Near Deer Bayou                           | 29° 59' 15"<br>93° 54' 29"       | N/A               |   |
| Neches River   | A15     | Near Port Neches at Star Enterprise docks | 29° 59' 34.66"<br>93° 56' 27.16" | N/A               | Staff on pile cluster 20 ft from north bank           |
| Neches River   | A16     | Beaumont Maritime Reserve dock            | 30° 01' 31.16"<br>94° 02' 19.46" | N/A               | Staff on timber bulkhead                              |
| Neches River   | A17     | Near Sun Oil pump station                 | 30° 00' 29.17"<br>93° 58' 39.8"  | N/A               | Staff on pile cluster 20 ft from north bank           |
| Neches River   | A18     | Beacon #56                                | ** 30° 03' 00"<br>94° 01' 30"    | N/A               | (Did not find staff during survey)                    |
| Neches River   | A19     | Near Star Bayou                           | 30° 04' 02.56"<br>94° 02' 59.52" | N/A               | Staff on timber bulkhead at Gulf Space Utilities Camp |
| Neches River   | A20     | At railroad bridge near River Front Park  | 30° 04' 55.22"<br>94° 05' 27.57" | N/A               | Staff on timber pile cluster 50 yd from shore         |
| Sabine Lake  | A21     | West Pass                                 | 29° 59' 31.85"<br>93° 47' 00.54" | N/A               | Staff on range marker about 40 ft from shore          |
| (Sheet 1 of 8)   |         |   |                                  |                   |   |
| Notes: NGVD relationships from table provided by Lynwood Weiss, USACE, Galveston District, dated March 22, 1990.<br>NOS Standard Chart numbers used.<br>** Estimated from chart. |         |   |                                  |                   |   |

| <b>Table B1 (Continued)</b>                                       |                |  |                                  |                          |  |
|---|----------------|--|----------------------------------|--------------------------|--|
| <b>Waterway</b>   | <b>Map Key</b> | <b>Location</b>                                      | <b>Lat/Long</b>                  | <b>MLT Ft Below NGVD</b> | <b>Comments</b>  |
| <b>Chart A (Includes NOAA Charts 11342 and 11343) (Continued)</b> |                |  |                                  |                          |  |
| Sabine River  | A22            | Sabine Pipeline                                      | 30° 02' 14.89"<br>93° 44' 21.51" | N/A                      | Staff on timber bulkhead   |
| Sabine River  | A23            | Port of Orange                                       | 30° 03' 48.74"<br>93° 43' 12.69" | N/A                      | East of Adams Bayou; staff on small wooden pier  |
| Sabine River  | A24            | Near Orange Harbor                                   | 30° 04' 46.88"<br>93° 43' 41.02" | N/A                      | Staff on timber bulkhead at shipyard   |
| Sabine River  | A25            | Near Phoenix Lake                                    | 30° 05' 04.52"<br>93° 43' 27.83" | N/A                      | Staff on timber bulkhead near American Bridge shipyard rear dock                         |
| Taylor Bayou Turning Basin  | A26            | Near intersection of GIWW and Port Arthur Ship Canal | 29° 50' 36.8"<br>93° 58' 13.0"   | N/A                      | Staff on shrimp boat timber dock   |
| Sabine River  | A27            | North of Black Bayou                                 | 30° 01' 04.72"<br>93° 44' 51.37" | N/A                      | Staff on red day marker 8  |
| Cow Bayou   | A28            | West of Sabine River at Round Bunch Bridge           | 30° 02' 14.42"<br>93° 47' 42.80" | N/A                      | Staff on cluster of mooring piles  |
| <b>Chart B (Includes NOAA Chart 11332)</b>                        |                |  |                                  |                          |  |
| Jetty Channel   | B1             | W. front range light                                 | ** 29 44 93 40                   | N/A                      | (Staff not visited during survey)  |
| Jetty Channel   | B2             | Pilot Station at Texas Point                         | 29° 41' 11.69"<br>93° 50' 26.16" | N/A                      | Staff on pilot boat dock   |
| Sabine Pass Channel   | B3             | Old Coast Guard Station                              | ** 29° 43'<br>93° 51'            | N/A                      | (Staff not visited during survey)  |
| Sabine Pass Channel   | B4             | U.S. Coast Guard                                     | 29° 43' 46.33"<br>93° 52' 14.62" | N/A                      | Staff on timber dock   |
| GIWW  | B5             | NE of marker 315 at Barnes Slough                    | 29° 37' 56.70" 94°<br>18' 18.00" | N/A                      | Staff at abandoned house on south bank of GIWW   |
| GIWW  | B6             | Near High Island                                     | 29° 36' 12.20" 94°<br>21' 55.12" | N/A                      | GIWW-south bank / State Hwy 124, AT&SF Railway bridge (destroyed); staff on timber pile  |
| GIWW  | B7             | At State Hwy. 124                                    | 29° 35' 41.24"<br>94° 23' 25.26" | N/A                      | Staff on small pier about 200 yd from bridge   |
| GIWW  | B8             | NW of Clam Lake                                      | 29° 42' 46.64"<br>94° 07' 27.26" | N/A                      | Staff on timber bulkhead at south bank (Sonat Exploration Company)                       |
| <b>Chart C (Includes NOAA Charts 11326 and 11329)</b>             |                |  |                                  |                          |  |
| GIWW – Gilchrist  | C1             | Off Faggard's Slip Road                              | 29° 31' 27.8"<br>94° 29' 11.7"   | N/A                      | At Rollover Pass; staff on south bank of GIWW  |
| Houston Ship Channel  | C2             | Near Battleship Texas                                | 29° 45' 20.63"<br>95° 05' 27.05" | N/A                      | Staff on bulkhead at park  |
| Clear Lake  | C3             | Near Ramp  | ** 29° 34'<br>95° 04'            | N/A                      | (Staff not visited during survey)  |
| Trinity River   | C4             | Trinity River Channel                                | ** 29° 33'<br>94° 47'            | N/A                      | At Smith Point near ramp   |
| GIWW  | C5             | Junction Canoe Creek                                 | ** 29° 45'<br>95° 45'            | N/A                      | Near Live Oak Bay & Boggy Bayou, south of Sargent  |
| Trinity River   | C6             | Trinity River Channel                                | ** 29° 46'<br>94° 45'            | 1.00                     | Near State Hwy 562 & Sykes Rd.; Round Point, north of Ash Point, near channel to Liberty |

(Sheet 2 of 8)

**Table B1 (Continued)**

| Waterway  | Map Key | Location  | Lat/Long                         | MLT Ft Below NGVD | Comments   |
|---|---------|---|----------------------------------|-------------------|--|
| <b>Chart C (Includes NOAA Charts 11326 and 11329) (Continued)</b> |         |   |                                  |                   |  |
| Houston Ship Channel  | C7      | At green channel marker 139                       | 29° 44' 17.03"<br>95° 06' 55.49" | N/A               |  |
| Houston Ship Channel  | C8      | South bank of channel under Beltway 8 toll bridge | 29° 44' 48.11"<br>95° 08' 59.73" | N/A               |  |
| Houston Ship Channel  | C9      | Near Green's Bayou and Todd's Ship Yard           | 29° 45' 11.0"<br>95° 10' 31.4"   | N/A               |  |
| Houston Ship Channel  | C10     | At Tessondlo Kerley plant                         | 29° 44' 55.54"<br>95° 11' 08.80" | N/A               |  |
| Houston Ship Channel  | C11     | At Morgan's Point                                 | 29° 40' 56.7"<br>94° 59' 02.7"   | N/A               | Near Barbour's Cut   |
| Houston Ship Channel  | C12     | Near Spilman's Isl. on range marker               | 29° 42' 5.0"<br>95° 01' 14.7"    | N/A               | Also near HWY 146  |
| Houston Ship Channel  | C13     | Near Alexander Island                             | 29° 43' 57.6"<br>95° 01' 56.9"   | N/A               | At Scott Bay; staff on rear range platform                                 |
| Houston Ship Channel  | C14     | Near Lynchburg Ferry                              | ** 29° 46'<br>95° 03'            | N/A               | Electronic tide gauge at this station                                      |
| Houston Ship Channel  | C15     | Near Battleship Texas Monument                    | 29° 45' 33.22"<br>95° 05' 21.97" | N/A               | Near green channel marker 151  |
| Clear Creek Channel   | C16     | Galveston Bay/Clear Creek                         | ** 29° 33'<br>95° 01'            | N/A               | (Staff not visited during survey)  |
| Bayport Ship Channel  | C17     | Bayport/Houston Channel junction                  | ** 29° 37'<br>95° 01'            | N/A               | (Staff not visited during survey)  |
| GIWW - High Island  | C18     | Approx. station 1800+00 in GIWW                   | N/A                              | N/A               | Staff on navigation range 11   |
| Houston Ship Channel  | C19     | At Mobile Mining Plant near Hunting Bayou         | 29° 44' 19.8"<br>95° 11' 44.76"  | N/A               |  |
| Houston Ship Channel  | C20     | At San Jacinto Mill above Washburn Tunnel         | 29° 43' 27.02"<br>95° 12' 54.20" | N/A               | Staff on green marker 163  |
| Houston Ship Channel  | C21     | At U.S. Coast Guard Station                       | 29° 43' 27.02"<br>95° 12' 54.20" | N/A               | Near Loop 610 bridge   |
| Houston Ship Channel  | C22     | Turning Basin                                     | 29° 44' 57.4"<br>95° 17' 27.1"   | 1.14              |  |
| Houston Ship Channel  | C23     | Bayport at Houston Yacht Club                     | 29° 37' 13.8"<br>94° 59' 52.5"   | N/A               | Off Shoreacres Road  |
| <b>Chart D (Includes NOAA Chart 11323)</b>                        |         |   |                                  |                   |  |
| GIWW - West Bay   | D1      | Near Caranchua Point                              | 29° 12' 37.90"<br>95° 02' 22.71" | 1.41              | Approx. 6 to 7 mi. east of Chocolate Bay; about 1000 ft east of marker 370 |
| GIWW - High Island  | D2      | At Stingaree Restaurant                           | 29° 28' 54"<br>94° 36' 19"       | N/A               | South bank of GIWW near Stingaree Road                                     |
| Texas City SC   | D3      | End of Texas City Dike                            | 29° 22' 02.00"<br>94° 48' 54.73" | 1.41              | Staff on north side of dike about 20 ft from dike                          |
| GIWW Main Chnl.   | D4      | Through Pelican Isl. (at Pelican Spit)            | 29° 20' 59.6"<br>94° 49' 09.9"   | N/A               | Staff near north bank  |
| Galveston SC  | D5      | Galveston Yacht Basin                             | 29° 19' 12.07"<br>94° 46' 38.29" | 1.41              |  |
| Galveston SC  | D6      | At Pelican Isl. Causeway                          | 29° 18' 45.06"<br>94° 49' 28.91" | 1.41              | Staff on timber pile cluster on south side of causeway                     |
| Texas City SC   | D7      | Range Platform at end of Texas City Dike          | 29° 21' 55.42"<br>94° 48' 53.24" | 1.41              | Staff on south side of (about 40 ft from) dike                             |

(Sheet 3 of 8)

| <b>Table B1 (Continued)</b>                            |                |  |                                  |                          |  |
|--|----------------|--|----------------------------------|--------------------------|--|
| <b>Waterway</b>  | <b>Map Key</b> | <b>Location</b>  | <b>Lat/Long</b>                  | <b>MLT Ft Below NGVD</b> | <b>Comments</b>  |
| <b>Chart D (Includes NOAA Chart 11323) (Continued)</b> |                |  |                                  |                          |  |
| GIWW - W. Galveston Bay                                | D8             | Causeway Fish Camp near HWY 45                           | 29° 17' 21.6"<br>94° 52' 26.8"   | 1.41                     | Near Offatts Bayou   |
| Galveston SC   | D9             | USACE boat basin   | 29° 19' 50.61"<br>94° 46' 25.36" | 1.41                     | Staff on timber pile   |
| Texas City SC  | D10            | At Texas City Dike (south side)                          | 29° 22' 58.1"<br>94° 51' 50.5"   | 1.41                     | Staff at 1 <sup>st</sup> ramp (from mainland) on south side of dike                    |
| Houston SC   | D11            | Eastern terminus of Bolivar Peninsula (at ferry landing) | 29° 21' 37"<br>94° 46' 56"       | 1.41                     | Damaged staff - does not match elevation reading at nearest staff                      |
| GIWW - Bolivar Peninsula                               | D12            | Near Stn 3130+00 at Shirley's Bait Camp                  | 29° 25' 51.0"<br>94° 42' 35.0"   | 1.41                     | This staff replaced the staff at 23 <sup>rd</sup> Canal                                |
| GIWW - Bolivar Peninsula                               | D13            | At Seiver's Cove (yacht basin) near Stn 2878+00          | 29° 25' 51.0"<br>94° 42' 35.0"   | 1.41                     | At Shirley's Blue Beacon Bait Camp   |
| GIWW - Bolivar Peninsula                               | D14            | West Canal Road near Stn 2622+00                         | 29° 28' 07.7"<br>94° 38' 34.6"   | 1.41                     | Tide staff has been missing for approx. past year                                      |
| Houston SC   | D15            | Eagle Point Marina at Baciff                             | 29° 29' 47.7"<br>94° 54' 39.0"   | N/A                      | Staff at East Bay shore  |
| <b>Chart E (Includes NOAA Charts 11321 and 11322)</b>  |                |  |                                  |                          |  |
| Chocolate Bay  | E1             | Staff on range marker                                    | 29° 10' 28.43"<br>95° 08' 5.85"  | N/A                      |  |
| GIWW - Chocolate Bayou                                 | E2             | Near Alligator Point                                     | 29° 10' 20.03"<br>95° 06' 38.76" | N/A                      | East of marker 375 at green day marker 1; south bank of GIWW                           |
| Freeport Entrance Channel                              | E3             | North bank of Surfside Coast Guard Station               | 28° 56' 37.06"<br>95° 18' 08.95" | N/A                      | Staff on concrete bulkhead   |
| Freeport Harbor  | E4             | Turning basin  | 28° 56' 25.15"<br>95° 20' 30.32" | 1.43                     | (Staff missing at time of survey)  |
| GIWW   | E5             | At Quintana swing bridge                                 | 28° 55' 17.68"<br>95° 20' 28.88" | N/A                      |  |
| Brazos River   | E6             | Brazos River entrance                                    | ** 28° 52'<br>95° 27'            | 1.43                     | (Staff not visited during survey)  |
| GIWW - San Bernard River                               | E7             | San Bernard River crossing at GIWW                       | 28° 52' 11.74"<br>95° 26' 47.47" | 1.43                     | North bank of GIWW; staff on abandoned boat dock at old bait camp                      |
| GIWW - Cedar Lakes                                     | E8             | North of Sargent Beach                                   | 28° 50' 26.71"<br>95° 31' 09.28" | N/A                      | On north bank of GIWW at mi. marker 410 (staff on pile)                                |
| GIWW - Cedar Lakes                                     | E9             | North of Sargent Beach                                   | 28° 49' 45.52"<br>95° 32' 07.48" | N/A                      | (Staff missing at time of survey); will be mounted on a 2 x 8 in board near north bank |
| GIWW - Surfside  | E10            | Public boat ramp #16 at surfside                         | 28° 58' 49.47"<br>95° 16' 09.68" | N/A                      | Staff near Bay Avenue between 390 & 400 mi. marker                                     |
| GIWW - Surfside  | N/A            | Near E10   | ---                              | N/A                      | (Staff not visited during survey)  |

(Sheet 4 of 8)

**Table B1 (Continued)**

| Waterway  | Map Key | Location   | Lat/Long                         | MLT Ft Below NGVD | Comments   |
|---|---------|--|----------------------------------|-------------------|--|
| <b>Chart E (Includes NOAA Charts 11321 and 11322) (Continued)</b> |         |  |                                  |                   |  |
| Freeport Entrance Channel   | E11     | Landward end of south jetty                                    | 28° 56' 15.97"<br>95° 18' 03.46" | N/A               | Staff on timber pile at dock   |
| GIWW – Brazos River   | E12     | Brazos River floodgates, east side                             | 28° 53' 47.59"<br>95° 22' 48.78" | N/A               | At USACE boathouse, approx. Stn 241+600, GIWW north bank               |
| GIWW – Brazos River   | E13     | Brazos River floodgates, west side                             | 28° 53' 43.80"<br>95° 23' 22.66" | N/A               | On north bank of GIWW  |
| GIWW – Sargent  | E14     | Sargent swing bridge   | 28° 46' 17.15"<br>95° 37' 01.73" | N/A               | 8-ft wooden staff on pile cluster at end of short pier                 |
| GIWW – Live Oak Bayou   | E15     | Near town of Chinquein   | 28° 45' 00.78"<br>95° 46' 59.84" | N/A               | East bank of Live Oak Bayou  |
| GIWW – Big Boggy Bayou  | E16     | North bank of Big Boggy Bayou                                  | 28° 44' 17.00"<br>95° 49' 37.89" | N/A               | Staff in board pounded into channel bottom about 40 ft from north bank |
| Chocolate Bayou   | E17     | Near Grassy Point on abandoned Coast Guard range               | 29° 11' 35.3"<br>95° 09' 00.8"   | 1.37              | Across from red channel marker 20                                      |
| Chocolate Bayou   | E18     | On abandoned Coast Guard range                                 | 29° 12' 05.3"<br>95° 10' 28.2"   | 1.37              | Near red day marker 34   |
| Chocolate Bayou   | E19     | Under 2004 Bridge  | 29° 12' 41.1"<br>95° 12' 28.1"   | 1.37              | Staff on west bank on boat ramp bulkhead                               |
| <b>Chart F (Includes NOAA Charts 11316, 11317, and 11319)</b>     |         |  |                                  |                   |  |
| GIWW - Port O'Conner  | F1      | U.S. Parks and Wildlife Office                                 | 28° 26' 17.4"<br>96° 25' 01.6"   | N/A               | Staff on concrete bulkhead   |
| Channel to Palacios   | F2      | Near Palacios Harbor   | 28° 41' 41.35"<br>96° 13' 34.42" | N/A               | Staff on survey table  |
| Channel to Red Bluff  | F3      | At railroad bridge near Hwy 616 bridge                         | 28° 49' 53.95"<br>96° 34' 41.23" | N/A               | (Staff missing at time of survey)                                      |
| GIWW – Matagorda  | F4      | 1000 ft east of Matagorda Harbor entrance                      | 28° 41' 33.40"<br>95° 57' 06.49" | N/A               | East of 440 mi. marker; staff on mooring pile cluster                  |
| GIWW  | F5      | At Old Gulf Plant  | 28° 43' 00.98"<br>95° 53' 23.75" | N/A               | North bank of GIWW on damaged timber dock                              |
| GIWW – Colorado River   | F6      | Matagorda swing bridge   | 28° 41' 13.12"<br>95° 53' 23.75" | N/A               | Staff on timber platform 1,000 ft east of highway                      |
| GIWW – Colorado River   | F7      | Colorado River locks; west of swing bridge in USACE boat house | 28° 41' 13.3"<br>95° 57' 56.6"   | 1.43              | Staff on timber bulkhead   |
| Colorado River Entrance Channel                                   | F8      | 1500 ft inland from mouth of Colorado River                    | 28° 36' 02.08"<br>95° 58' 43.41" | N/A               | Staff on timber pile on east shore of channel                          |
| Colorado River Entrance Channel                                   | F9      | Mouth of Colorado River - west bank                            | 28° 35' 41"<br>95° 59' 05"       | N/A               | Staff on day marker 3  |
| Colorado River Entrance Channel                                   | F10     | River Bend Boat Camp   | 28° 40' 14.71"<br>95° 57' 55.57" | N/A               | Staff on timber pile at boat dock                                      |

(Sheet 5 of 8)

**Table B1 (Continued)**

| Waterway  | Map Key | Location   | Lat/Long                         | MLT Ft Below NGVD | Comments   |
|---|---------|--|----------------------------------|-------------------|--|
| <b>Chart F (Includes NOAA Charts 11316, 11317, and 11319) (Continued)</b> |         |  |                                  |                   |  |
| GIWW – Colorado River   | F11     | West side of the east Colorado River lock            | 28° 40' 58.1"<br>95° 58' 27.5"   | 1.43              | Staff on steel / timber barge fender                                     |
| GIWW – Colorado River   | F12     | West side of the west Colorado River lock            | 28° 40' 37.64"<br>95° 59' 02.84" | 1.43              | Staff on board pounded into channel bottom approx. 5 ft from south bank  |
| GIWW  | F13     | 3,000 ft west of mile marker 445                     | 28° 39' 31.40"<br>96° 02' 22.46" | N/A               | Staff on board pounded into channel bottom approx. 20 ft from south bank |
| GIWW  | F14     | Hollywood Matagorda Ship Terminals                   | 28° 37' 12.0"<br>96° 08' 02.8"   | N/A               | Staff on timber dock on north bank                                       |
| GIWW  | F15     | Coast Guard day marker 5                             | 28° 36' 38.85"<br>96° 09' 45.31" | N/A               | Staff approx. 40 ft from south bank                                      |
| GIWW – Matagorda Bay  | F16     | At Stn 540+000 survey table                          | 28° 34' 54.37"<br>96° 11' 16.46" | N/A               | Just south of Oyster Lake  |
| GIWW – Matagorda Bay  | N/A     | Possibly another staff west of F16                   | —                                | N/A               | (Staff not visited during survey)  |
| Colorado River  | F17     | Turning basin  | 28° 51' 46.45"<br>96° 11' 16.46" | N/A               | Staff on timber pile at ship dock  |
| Colorado River  | F18     | Approx. 5 mi. south of turning basin                 | —                                | N/A               | (Staff not visited during survey)  |
| Channel to Red Bluff  | F19     | Staff at boat ramp under Hwy 616 bridge              | 28° 50' 01.45"<br>96° 34' 37.00" | N/A               | Staff on timber bulkhead   |
| Port Lavaca Channel   | F20     | Lighthouse beach and bird sanctuary park near Hwy 35 | 28° 38' 23.17"<br>96° 36' 44.11" | N/A               | Staff on timber bulkhead near boat ramp                                  |
| Port Lavaca Channel   | F21     | Port Lavaca Harbor at Lynn Bayou                     | 28° 37' 20.85"<br>96° 37' 24.35" | N/A               | Staff on timber pile at concrete shrimp boat dock                        |
| Port Lavaca Channel   | F22     | Channel harbor of refuge at Town of Port Lavaca      | 28° 35' 46.43"<br>96° 37' 05.09" | N/A               | Staff on timber bulkhead at Farm Land ship dock                          |
| Matagorda Ship Channel  | F23     | Lavaca Bay green beacon 71                           | 28° 36' 55.43"<br>96° 34' 3.23"  | 1.00              |  |
| Matagorda Ship Channel  | F24     | Turning basin at Point Comfort                       | 28° 38' 25.61"<br>96° 33' 48.29" | N/A               | Staff on survey table near green beacon 79                               |
| Matagorda Ship Channel  | F25     | Lavaca Bay   | 28° 35' 39.31"<br>96° 33' 54.70" | 1.00              | Staff on damaged survey table at beacon 65                               |
| <b>Chart G (Includes NOAA Charts 11313 and 11315)</b>                     |         |  |                                  |                   |  |
| GIWW  | G1      | Red day marker 14                                    | 28° 19' 17.73"<br>96° 39' 40.03" | N/A               | Day marker near GIWW / Victoria Barge Canal junction                     |
| GIWW  | G2      | Aransas Refuge                                       | 28° 13' 37.5"<br>96° 47' 42.4"   | N/A               | Aransas wildlife refuge across waterway from the state ramp              |
| GIWW  | G3      | Survey table at Sundown Bay                          | 28° 11' 02.3"<br>96° 51' 01.1"   | N/A               | At Stn 802+532.8 near green day marker 7                                 |

(Sheet 6 of 8)

| <b>Table B1 (Continued)</b>                                       |                |   |                                  |                          |  |
|---|----------------|---|----------------------------------|--------------------------|--|
| <b>Waterway</b>   | <b>Map Key</b> | <b>Location</b>                                   | <b>Lat/Long</b>                  | <b>MLT Ft Below NGVD</b> | <b>Comments</b>  |
| <b>Chart G (Includes NOAA Charts 11313 and 11315) (Continued)</b> |                |   |                                  |                          |  |
| Aransas Bay   | G4             | Goose Island State Park                           | 28° 07' 43.1"<br>96° 59' 07.6"   | N/A                      | Staff on timber fishing pier near boat ramp                            |
| Aransas Bay   | G5             | Fulton Harbor public boat ramp                    | 28° 03' 37.4"<br>97° 01' 59.5"   | N/A                      | Staff near end of damaged timber shrimp boat pier                      |
| GIWW  | G6             | Rockport Harbor inner basin                       | 28° 01' 27.3"<br>97° 03' 00.9"   | N/A                      | Staff in SW side of harbor on timber bulkhead along boat ramp          |
| Channel to Victoria   | G7             | Green night marker 11                             | 28° 19' 39.56"<br>96° 41' 20.99" | N/A                      | Near Victoria "Y" channel  |
| Channel to Victoria   | G8             | Intersection with Channel to Seadrift             | 28° 23' 05.53"<br>96° 43' 40.63" | N/A                      | Staff mounted on survey table  |
| Channel to Victoria   | G9             | At Bloomington railroad bridge                    | ---                              | N/A                      | Staff on fender wall   |
| GIWW  | G10            | At Union Carbide Plant's barge canal              | ---                              | N/A                      | Staff on timber pushboat dock  |
| Channel to Seadrift   | G11            | Seadrift Bait Company                             | 28° 24' 28.0"<br>96° 42' 44.0"   | N/A                      | Staff on wooden bulkhead   |
| GIWW  | G12            | Shoalwater Bay at Charlie's Bait Camp             | 28° 21' 50.6"<br>96° 34' 51.6"   | N/A                      | Staff on red day marker 8  |
| GIWW  | G13            | Shoalwater Bay                                    | 28° 20' 37.80"<br>96° 37' 05.14" | N/A                      | Staff on red day marker 10   |
| GIWW  | G14            | Near Grass Island                                 | 28° 19' 45.82"<br>96° 38' 46.19" | N/A                      | Staff on red day marker 12   |
| <b>Chart H (Includes NOAA Charts 11307 and 11308)</b>             |                |   |                                  |                          |  |
| GIWW  | H1             | Mooring basin Ingleside                           | 27° 48' 55.4"<br>97° 12' 12.8"   | N/A                      | South of Ingleside; staff on concrete mooring platform                 |
| GIWW - Upper Laguna Madre   | H2             | Staff on USACE survey table near green beacon 169 | 27° 23' 05.1"<br>97° 22' 12.4"   | N/A                      | South of Bird Island launch  |
| GIWW - Upper Laguna Madre   | H3             | USACE survey table at Stn 78+000                  | 27° 29' 01.04"<br>97° 19' 12.08" | N/A                      | North of Bird Island launch  |
| GIWW - Upper Laguna Madre   | H4             | JFK Causeway                                      | 27° 38' 05.60"<br>97° 14' 22.24" | N/A                      | Staff on cluster of timber piles near ship fender                      |
| Aransas Pass Entrance Channel                                     | H5             | Port Aransas inner harbor                         | 27° 50' 25.96"<br>97° 03' 51.46" | N/A                      | Staff on timber pile on pier (in boat slip)                            |
| GIWW - Aransas Pass   | H6             | North end of Dale Miller Bridge                   | 27° 53' 47.5"<br>97° 08' 02.9"   | N/A                      | Staff on timber pile cluster under bridge                              |
| Corpus Christi Ship Channel                                       | H7             | USACE office                                      | 27° 48' 37.5"<br>97° 23' 39.8"   | N/A                      | Staff (missing at time of survey) on concrete bulkhead                 |
| Corpus Christi Ship Channel                                       | H8             | Harbor Bridge                                     | 27° 48' 43.8"<br>97° 23' 47.1"   | N/A                      | Staff on concrete bulkhead overlooking harbor on south side of channel |
| La Quinta Channel   | H9             | Staff on timber platform                          | 27° 50' 16.7"<br>97° 13' 50.8"   | N/A                      | Platform marks pipeline crossing                                       |
| Jewell Fulton Channel   | H10            | North Shore docks in Ingleside                    | 27° 50' 57.0"<br>97° 13' 18.5"   | N/A                      | Staff on bulkhead in boat slip   |
| La Quinta Channel   | H11            | State boat ramp at Ingleside Cove                 | 27° 50' 15.6"<br>97° 13' 13.8"   | N/A                      | Staff on timber pier adjacent to ramp                                  |
| Corpus Christi Ship Channel                                       | H12            | Turning basin at Tule bridge                      | 27° 49' 09.1"<br>97° 27' 07.3"   | N/A                      | Staff on steel fender  |

(Sheet 7 of 8)



**Table B1 (Concluded)**

| Waterway   | Map Key | Location                                | Lat/Long                         | MLT Ft Below NGVD | Comments  |
|--|---------|---|----------------------------------|-------------------|---|
| <b>Chart I (Includes NOAA Chart 11304)</b>         |         |   |                                  |                   |   |
| Port Mansfield Channel                             | I1      | Piling - Nav District Warehouse         | 26° 33' 25.01"<br>97° 25' 38.63" | N/A               | Piling in front of Navigation District Warehouse  |
| Port Mansfield Channel                             | I2      | Beacon #27 at GIWW and channel junction | ** 26° 34'<br>97° 24'            | N/A               | Beacon 27 shown on chart, not on 020 table  |
| Port Mansfield Channel                             | I3      | Beacon #21                              | ** 26° 34'<br>97° 22'            | N/A               | Just to East of Poil bank Levee   |
| Port Mansfield Channel                             | I4      | Beacon #13                              | ** 26° 34'<br>97° 19'            | N/A               | ½ way from Gulf through Padre Island  |
| Port Mansfield Channel                             | I5      | Beacon #8                               | ** 26° 34'<br>97° 16'            | N/A               | Near Gulf and channel junction  |
| GIWW - Upper Laguna Madre                          | I6      | Survey table at Stn 190+863             | 27° 12' 56.95"<br>97° 25' 23.69" | N/A               |   |
| GIWW - Upper Laguna Madre                          | I7      | South of Yarborough Pass at Stn 242+500 | 27° 04' 34.11"<br>97° 26' 32.23" | N/A               | Staff on private pier on timber pile; house address 1114                                  |
| <b>Chart J (Includes NOAA Charts 11301, 11303)</b> |         |   |                                  |                   |   |
| Channel to Harlingen                               | J1      | End of turning basin                    | 26° 11' 56.99"<br>97° 35' 56.93" | N/A               |   |
| Channel to Harlingen                               | J2      | Beacon #27                              | 26° 18' 18.87"<br>97° 31' 30.86" | N/A               |   |
| Channel to Harlingen                               | J3      | Beacon #32                              | 26° 17' 04.25"<br>97° 34' 34.49" | N/A               |   |
| Channel to Harlingen                               | J4      | Beacon #25                              | 26° 19' 36.87"<br>97° 30' 47.68" | N/A               |   |
| Channel to Harlingen                               | J5      | Beacon #22                              | 26° 19' 55.48"<br>97° 27' 57.91" | N/A               |   |
| Channel to Harlingen                               | J6      | Beacon #19                              | 26° 19' 27.84"<br>97° 26' 48.28" | N/A               |   |
| Brownsville Channel                                | J9      | Center range table                      | 26° 02' 16.61"<br>97° 12' 43.19" | N/A               | New center line range table south side east corner approx. Station 19+400                 |
| Brownsville Channel                                | J10     | Beacon #35                              | 26° 00' 56.61"<br>97° 15' 28.30" | N/A               |   |
| Brownsville Channel                                | J11     | Center range table                      | 25° 58' 28.30"<br>97° 19' 56.93" | N/A               | New center line range table on the south side of the channel approx. Station 64+500       |
| Brownsville Channel                                | J12     | Grain Elevator                          | 25° 57' 21.95"<br>97° 23' 08.11" | N/A               | Feature not shown on chart. 020 table: At Grain Elevator east corner facing the channel   |
| Brownsville Channel                                | J13     | West Docks                              | ** 25° 57'<br>97° 24'            | N/A               | End of turning basin west docks, south corner just north of navigation district boat ramp |

(Sheet 8 of 8)



# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

|   |   |  |   |  |
|---|---|--|---|--|
| <b>1. AGENCY USE ONLY (Leave blank)</b>   |   | <b>2. REPORT DATE</b><br>October 1997          | <b>3. REPORT TYPE AND DATES COVERED</b><br>Final report                       |  |
| <b>4. TITLE AND SUBTITLE</b><br>Needs Assessment for Water-Level Gauging Along the Texas Coast for the U.S. Army Engineer District, Galveston   |   |  | <b>5. FUNDING NUMBERS</b>   |  |
| <b>6. AUTHOR(S)</b><br>Nicholas C. Kraus, Carroll I. Thurlow, Daniel J. Heilman, Anne-Lise Lindquist, Mark W. Earle   |   |  |   |  |
| <b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b><br>U.S. Army Engineer Waterways Experiment Station, 3909 Halls Ferry Road, Vicksburg, MS 39180-6199<br>Conrad Blucher Institute for Surveying and Science, Texas A&M University-Corpus Christi, 6300 Ocean Drive, Corpus Christi, TX 78412-5599   |   |  | <b>8. PERFORMING ORGANIZATION REPORT NUMBER</b><br>Technical Report CHL-97-29 |  |
| <b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b><br>U.S. Army Engineer District, Galveston<br>Jadwin Building, P.O. Box 1229<br>Galveston, TX 77553-1229  |   |  | <b>10. SPONSORING/MONITORING AGENCY REPORT NUMBER</b>                         |  |
| <b>11. SUPPLEMENTARY NOTES</b><br>Available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.   |   |  |   |  |
| <b>12a. DISTRIBUTION/AVAILABILITY STATEMENT</b><br>Approved for public release; distribution is unlimited.  |   |  | <b>12b. DISTRIBUTION CODE</b>   |  |
| <b>13. ABSTRACT (Maximum 200 words)</b><br><p>The U.S. Army Engineer District, Galveston, conducts navigation channel maintenance and operations along the Texas coast from the Sabine River on the north to the Brownsville Ship Channel on the south. The Galveston District has identified a need to have both real-time and recorded water-level data in order to conduct navigation channel maintenance and operation, coastal engineering, and environmental regulatory functions in an economical and accurate way. This report identifies general and specific needs for water-level information, and gives recommendations for obtaining such information. Communications alternatives for supplying real-time, voice-reported, and archived data to the Galveston District are discussed.</p> |   |  |   |  |
| <b>14. SUBJECT TERMS</b><br>Navigation channel maintenance<br>Tide gauges<br>Tides  |   |  | U.S. Army Engineer District, Galveston<br>Water level                         |  |
|   |   |  | <b>15. NUMBER OF PAGES</b><br>79  |  |
|   |   |  | <b>16. PRICE CODE</b>   |  |
| <b>17. SECURITY CLASSIFICATION OF REPORT</b><br>UNCLASSIFIED  | <b>18. SECURITY CLASSIFICATION OF THIS PAGE</b><br>UNCLASSIFIED | <b>19. SECURITY CLASSIFICATION OF ABSTRACT</b> | <b>20. LIMITATION OF ABSTRACT</b>   |  |



Destroy this report when no longer needed. Do not return it to the originator.

**DEPARTMENT OF THE ARMY**

WATERWAYS EXPERIMENT STATION, CORPS OF ENGINEERS

3909 HALLS FERRY ROAD

VICKSBURG, MISSISSIPPI 39180-6139

Official Business

**SPECIAL  
FOURTH CLASS  
BOOKS/FILM**

266/L25/ 1

DATA/DOCUMENT LIBRARY, WHOI

MCLEAN LAB, MS #8

360 WOOD HOLE ROAD

WOODS HOLE MA 02543-1539

